


٢٠٠ / Descriptions


• È / Features

٧ ٣ / Applications

ﻟﻭ ﺁ = ﺍ / Equivalent Circuit



ﺁ ﻟ ﺅ / Pinning



ﺍ. ﻩ ﺅ / Marking

	*	*







绝对最大值 / Absolute Maximum Ratings(Ta=25 ℃)

			℃
			℃


电 学 特 性 / Electrical Characteristics(Ta=25 ℃)

						μ
						μ


电 压 电 流 特 性 曲 线 / Electrical Characteristic Curve

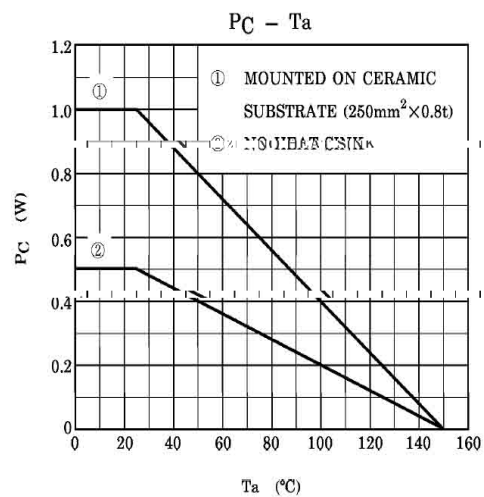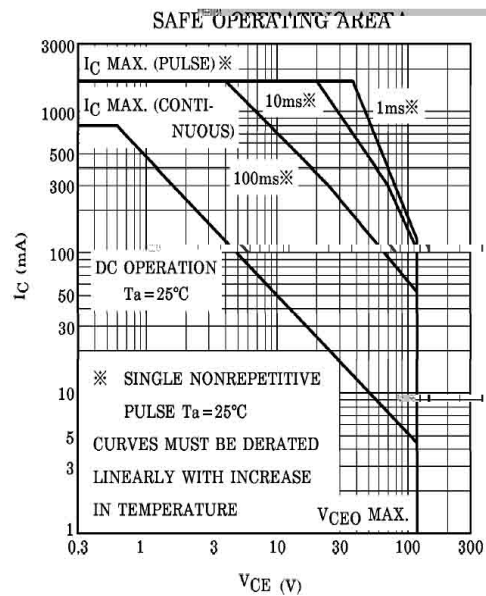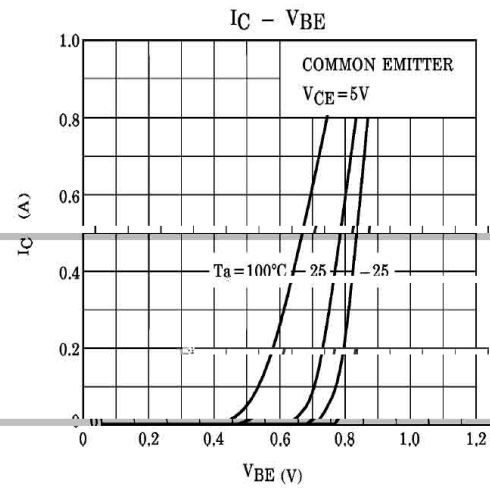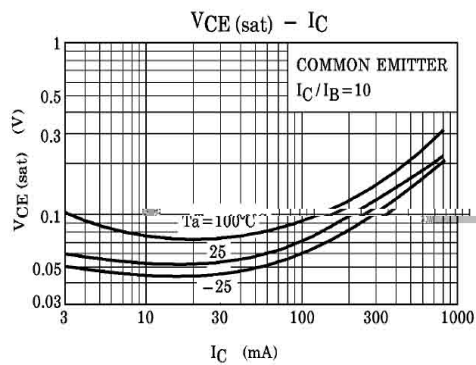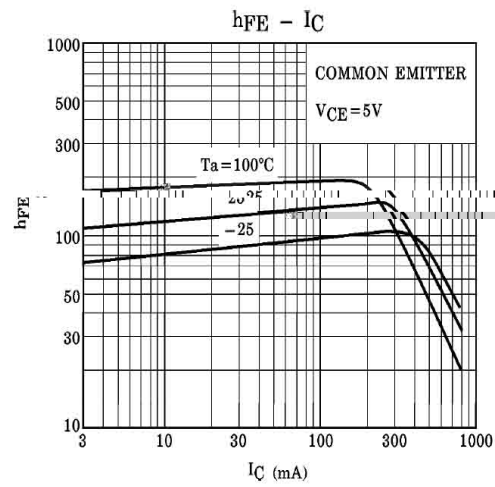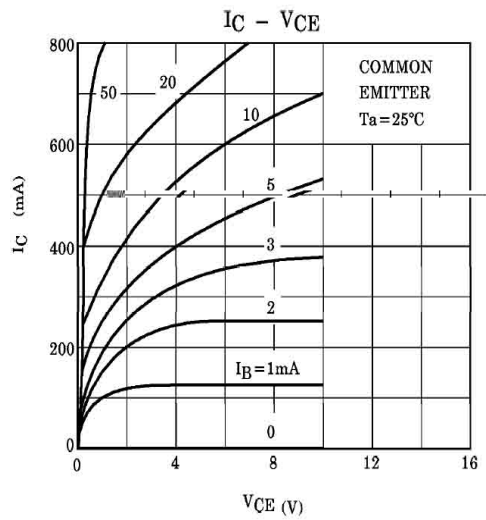


⌘ È Ò Ì ð / Package Dimensions

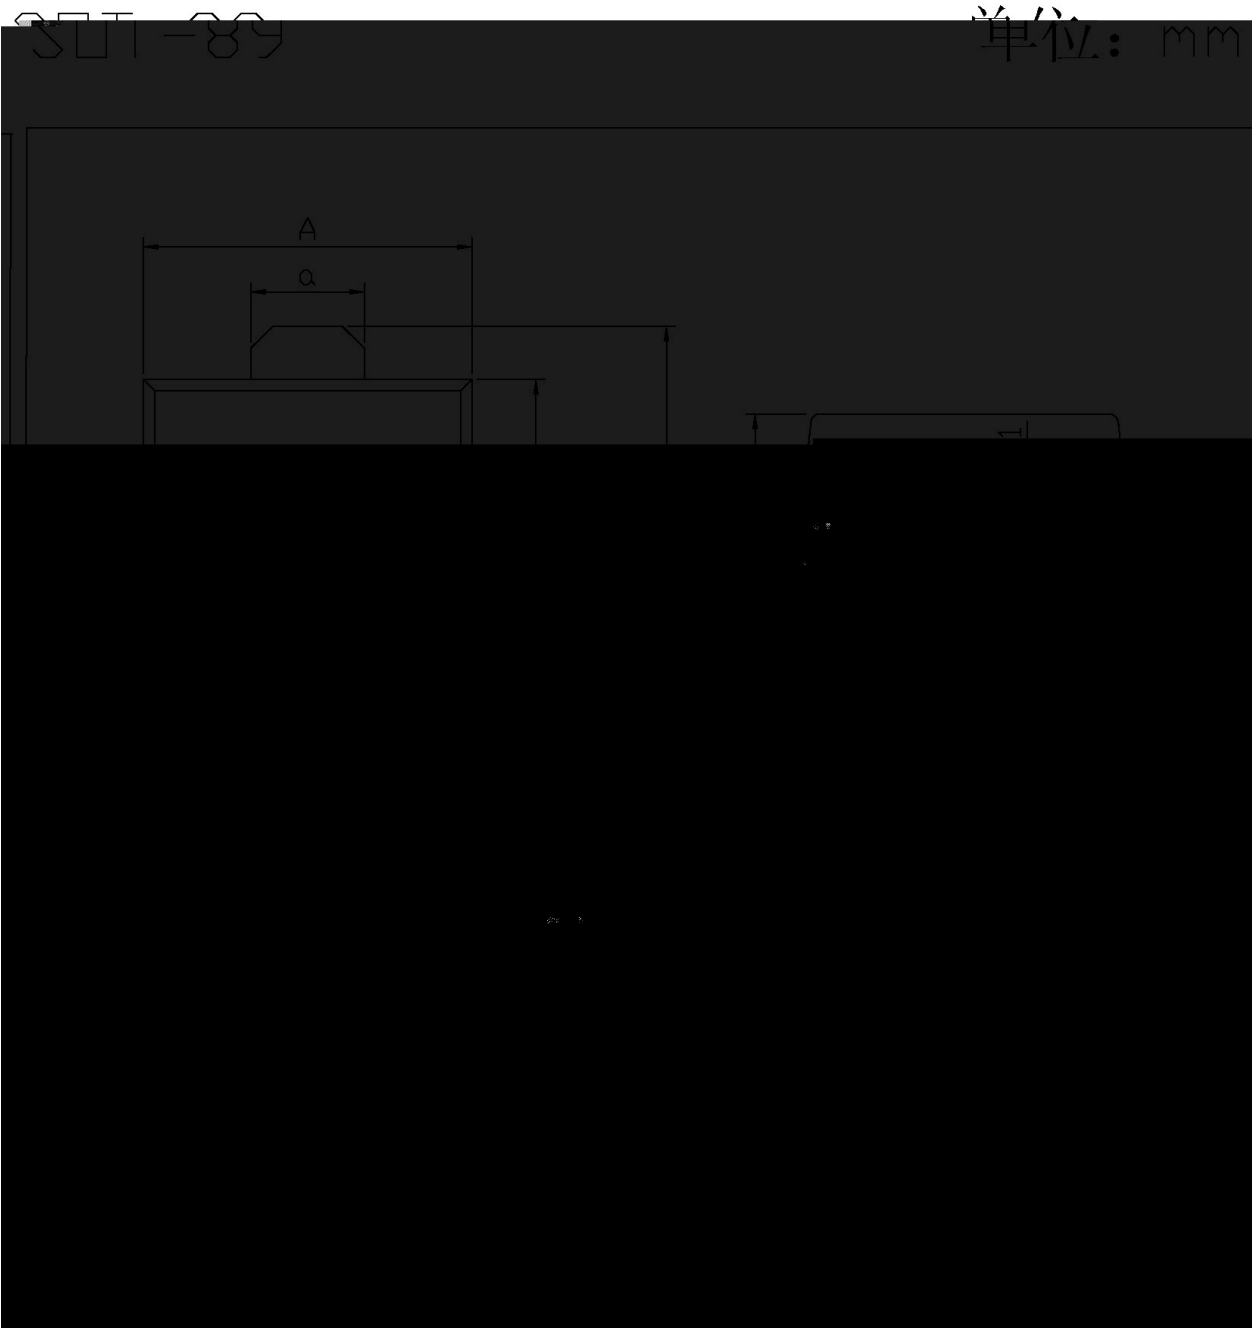

4. 1. 1 / Marking Instructions

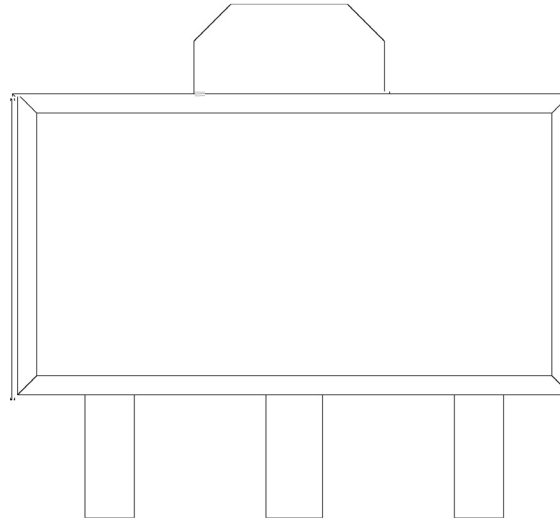

Thermal Characteristics / Whp shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0lueh,

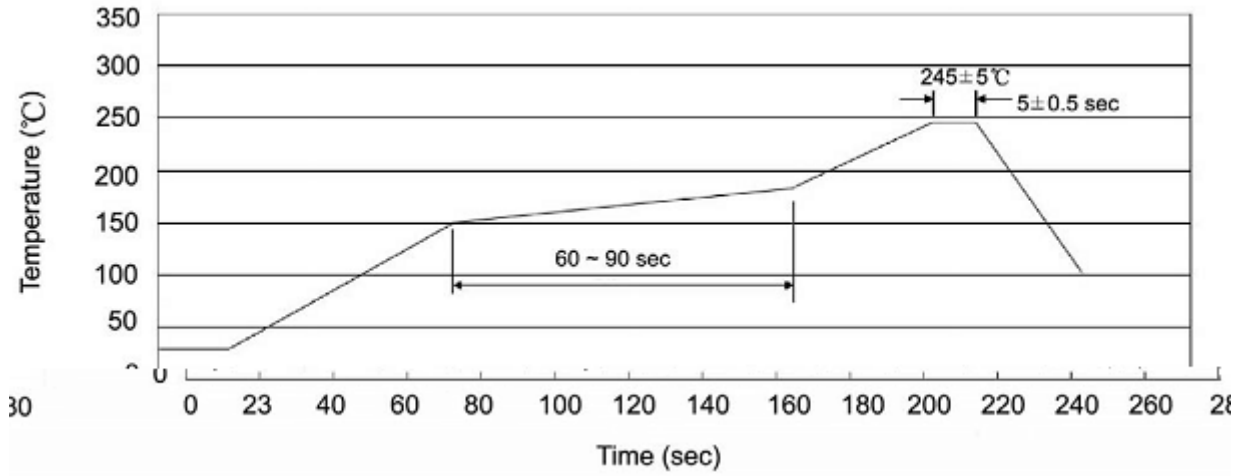

Resistance to Soldering Heat Test Conditions

°C

Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-89	1,000	7	7,000	8	56,000	7 ×12	180×120×180	385×257×392

Notices