

/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit




/ Pinning



PIN	DESCRIPTION
1	Cathode
2	Anode

The recommended mounting pad size

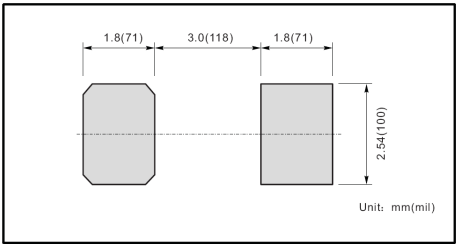

/ Marking

Marking

Type number	Marking code
BRLV5T40BF	5T40





/ Absolute Maximum Ratings(Ta=25)

	()		
)			
)	θ		


/ Electrical Characteristics(Ta=25)

		℃		
		℃		
		℃		
		℃		
)		℃		
		℃		
		℃		


/ Electrical Characteristic Curve

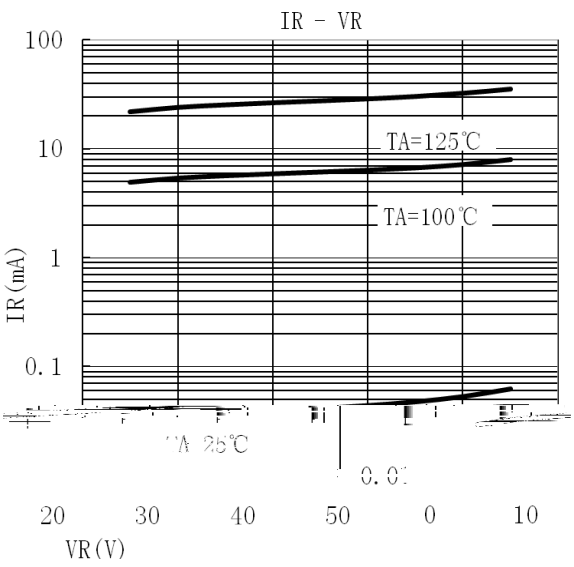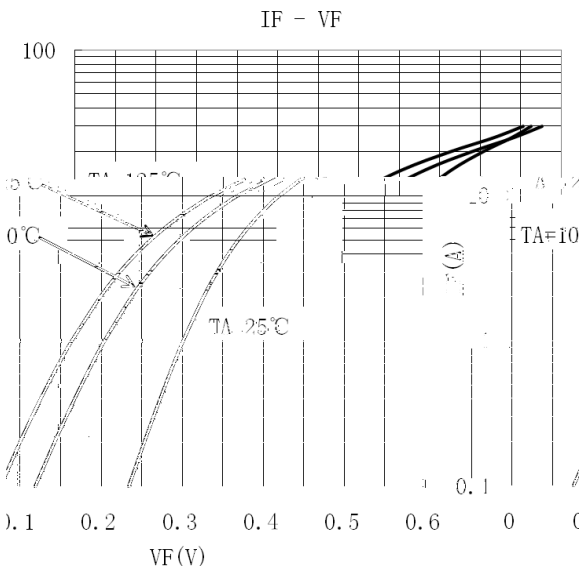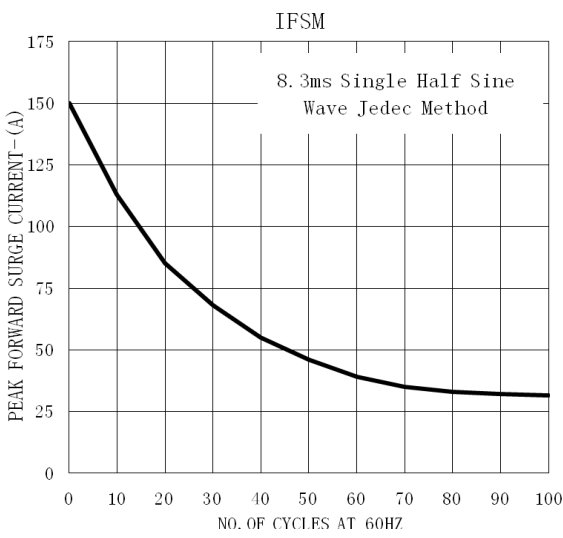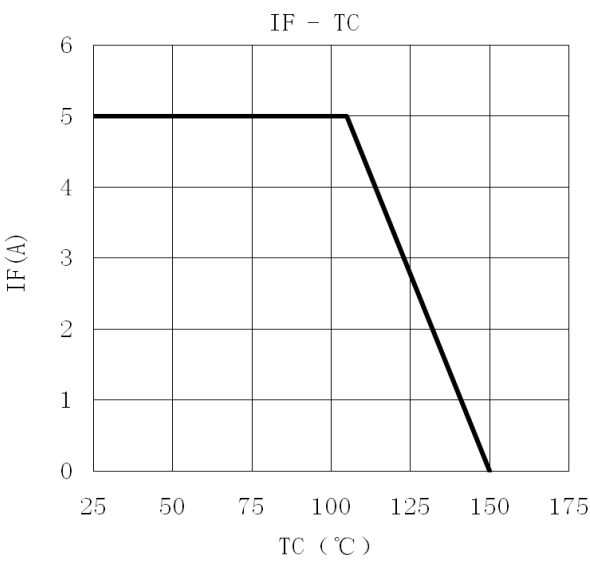


/ Package Dimensions

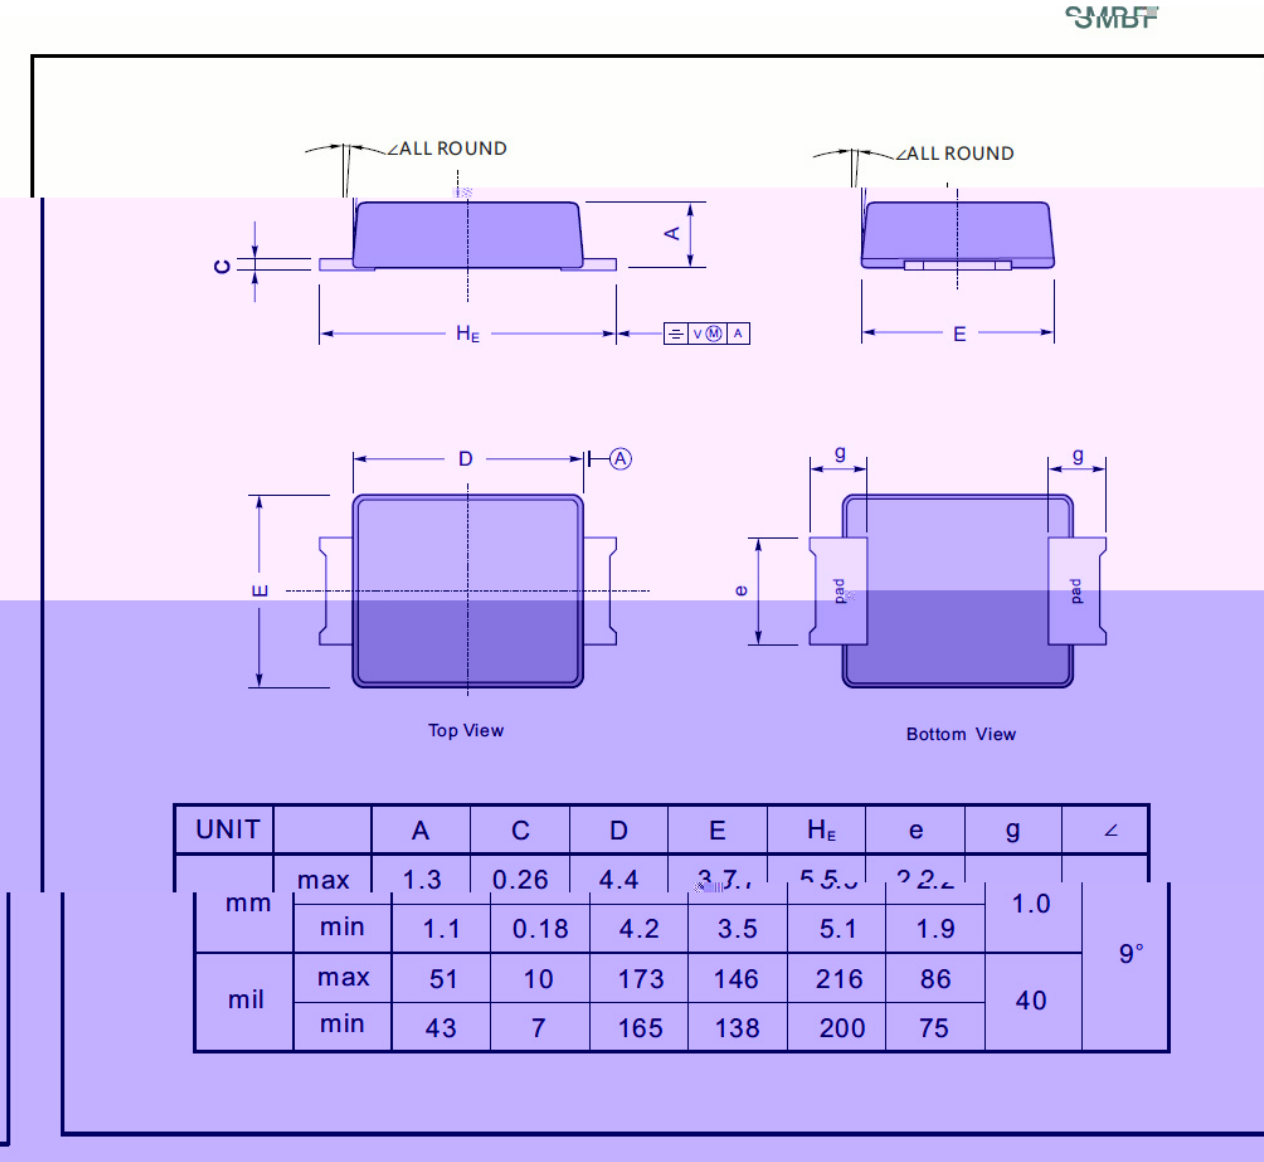

/ Marking Instructions

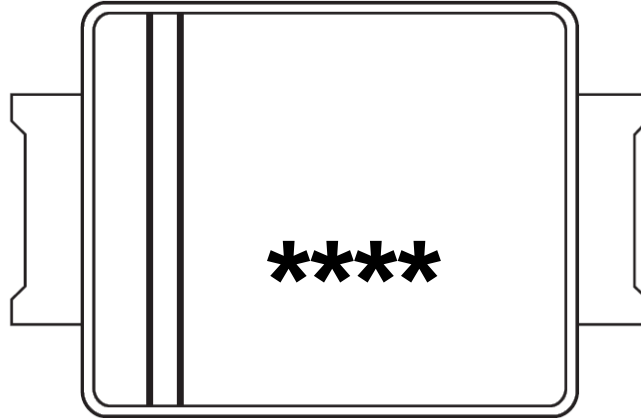

() /

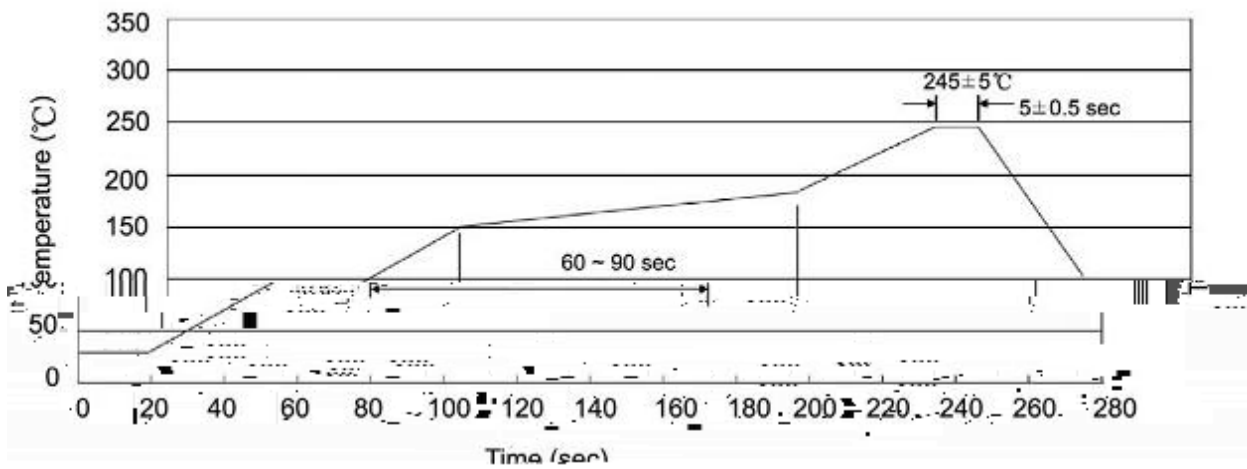

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
						"		

/ Notices