

/ Descriptions

TO-252


/ Features

/ Applications


OR-ing

DC-DC

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)


		x	

/ Electrical Characteristics(Ta=25)


1.
2.

/ Electrical Characteristic Curve


IF - TC

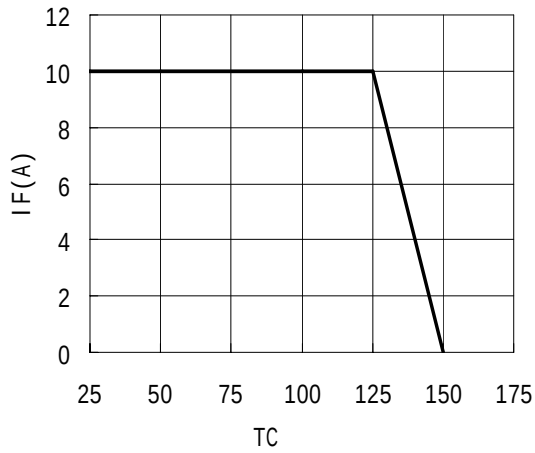


IFSM

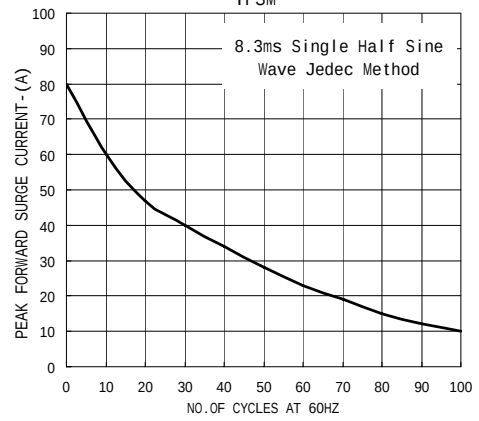


IF - VF

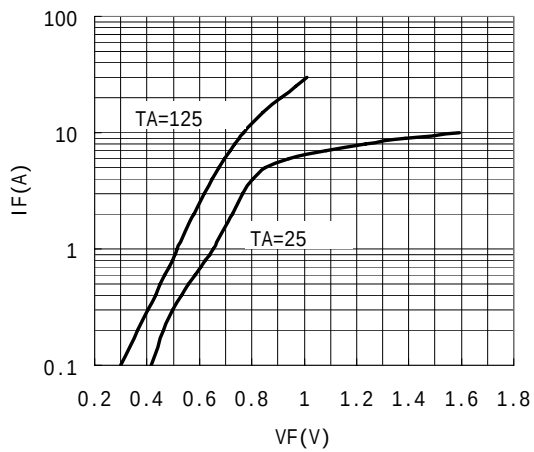


IR - VR

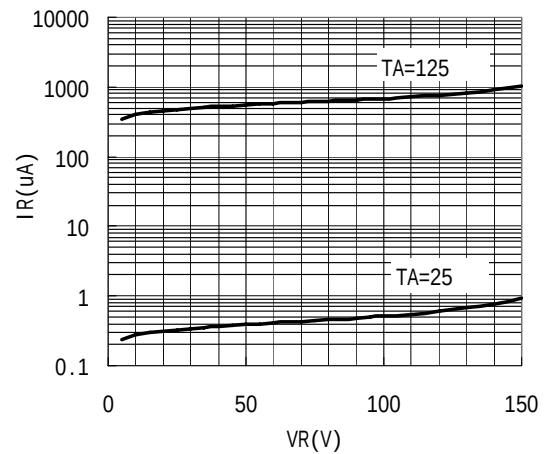


CJ - VR

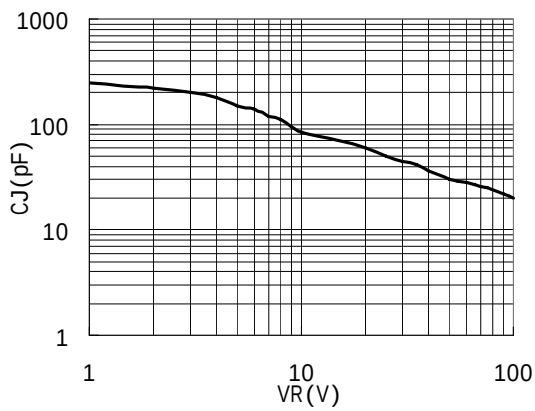

/ Package Dimensions

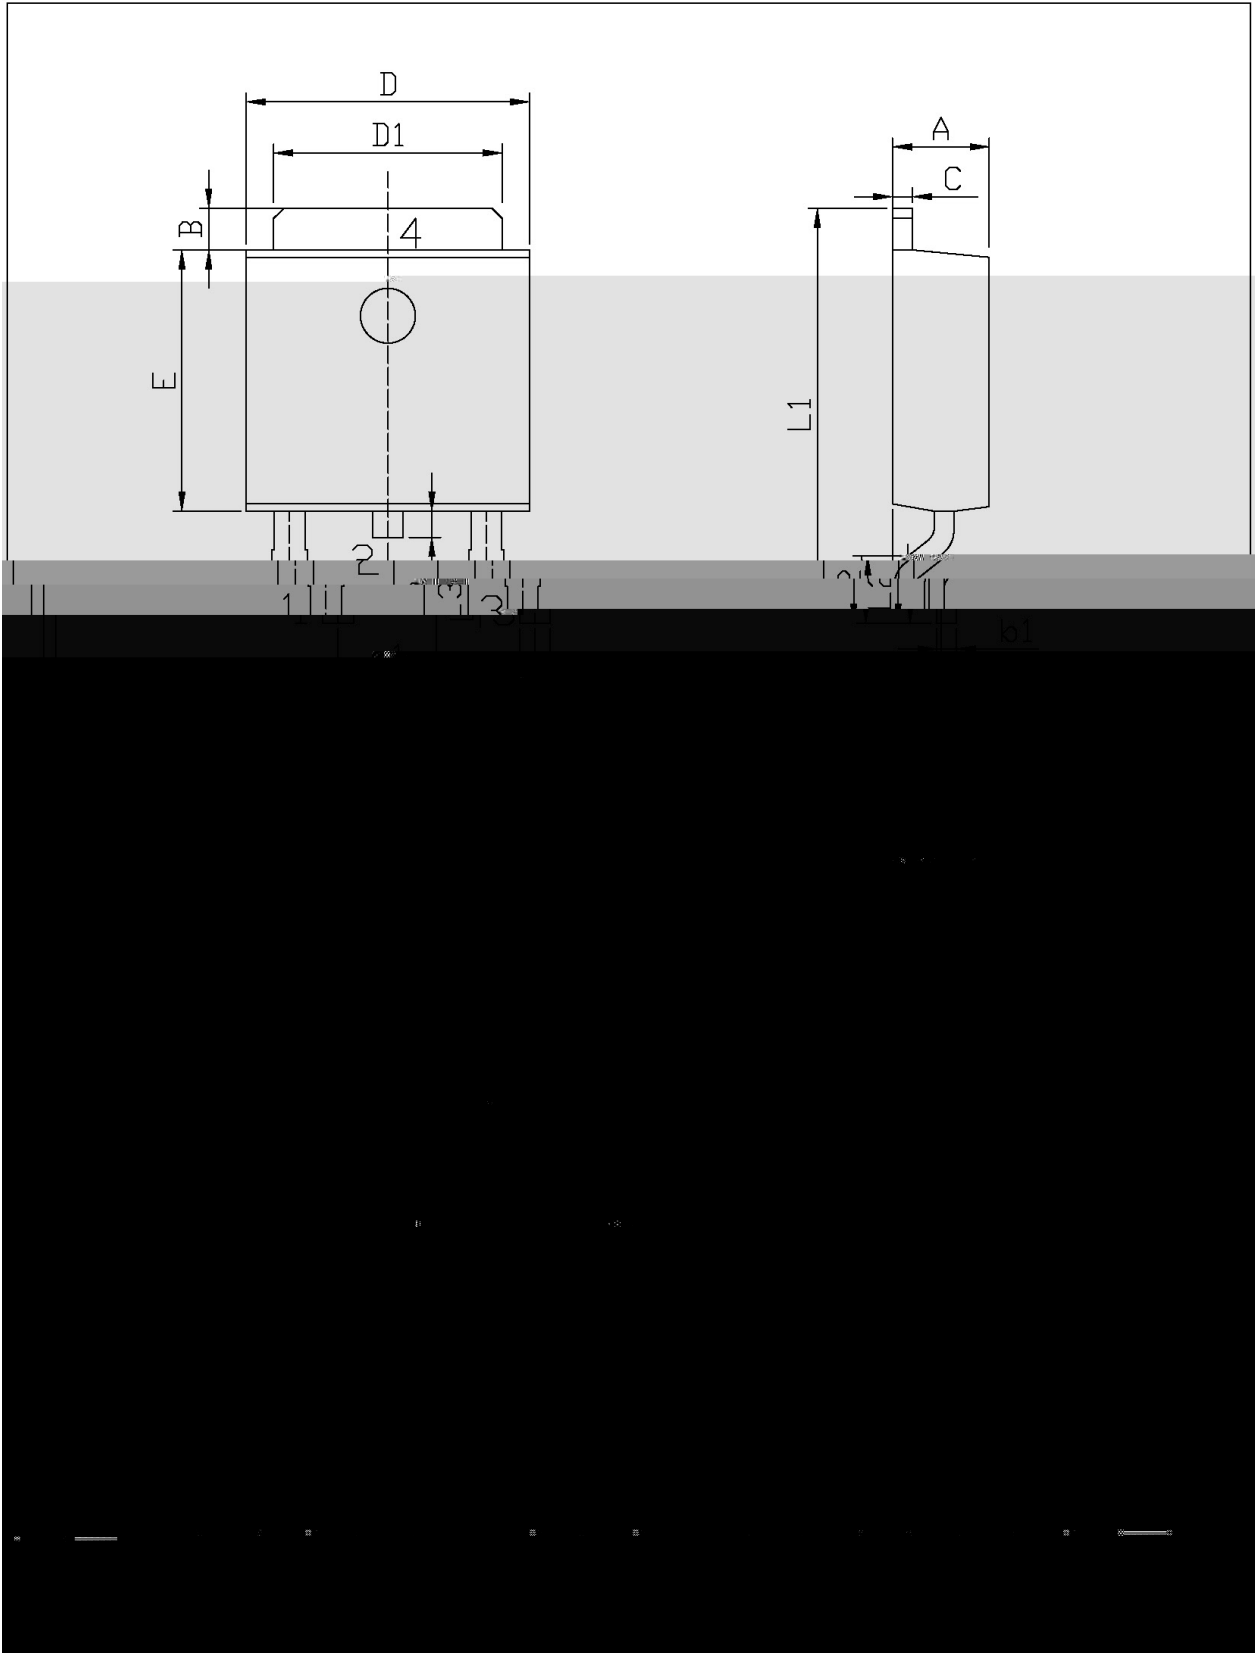

/ Marking Instructions

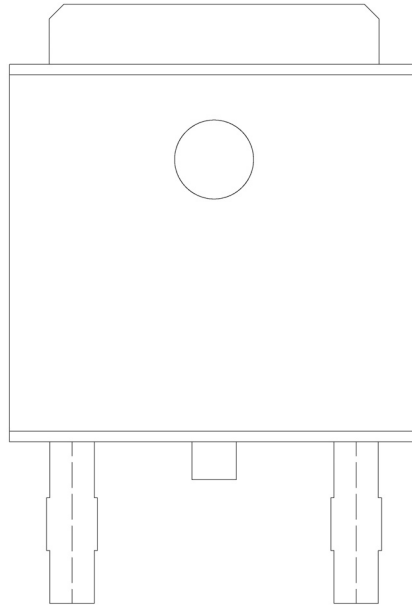


BR

LV10150

CT:

() /

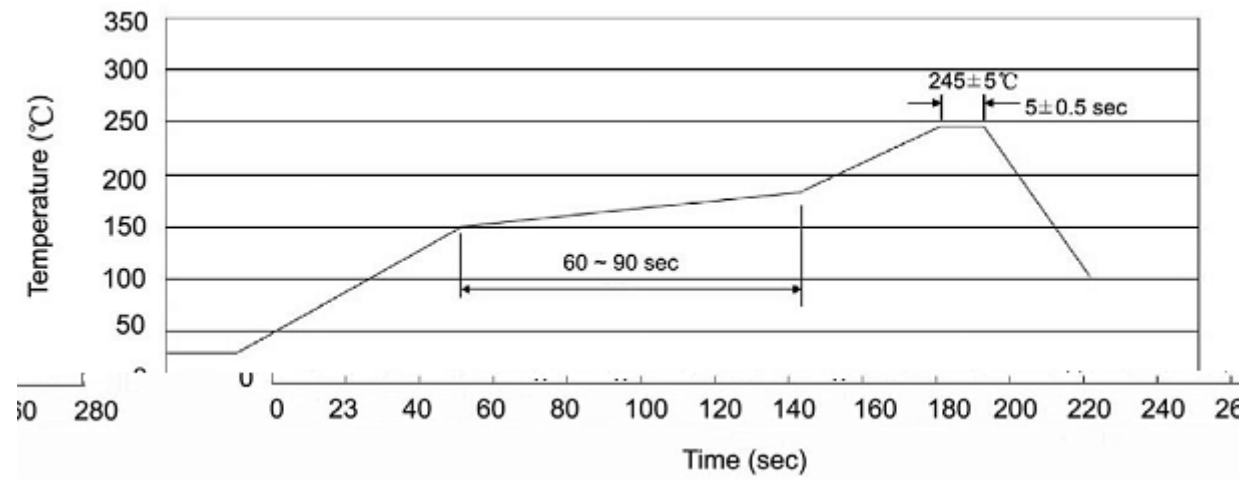

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱

封装形式	包装数量					包装尺寸		
	只 套管	套管 盒	只 盒	盒 箱	只 箱	套管	盒	箱

/ Notices