

/ Descriptions

50V~1000V 1.0A

/ Features


RoHS 2011/65/EU
C

/ Applications

/ Equivalent Circuit




/ Pinning

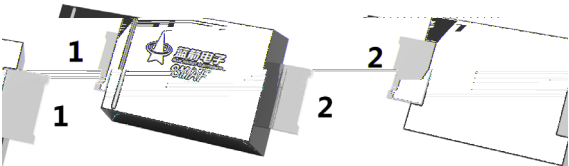

PIN	DESCRIPTION
1	Cathode
2	Anode

The recommended mounting pad size

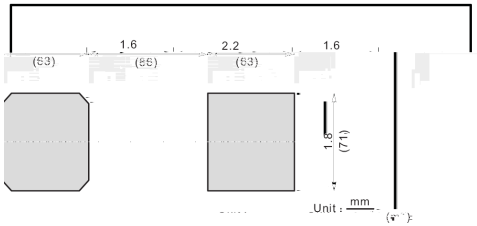

/ Marking

/ Absolute Maximum Ratings(Ta=25)

℃	()								
)									
	θ								℃
									℃

/ Electrical Characteristics(Ta=25)

			数值						
		℃							μ
		℃							μ

/ Electrical Characteristic Curve

Fig.1 Forward Current Derating Curve

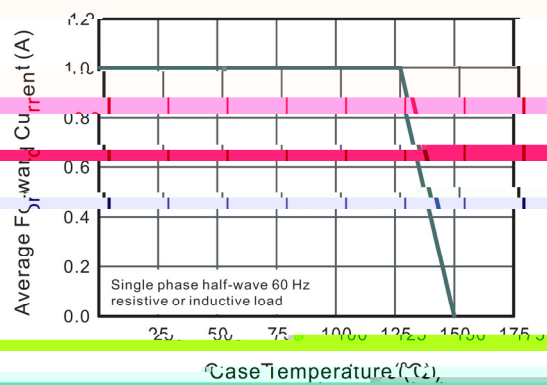


Fig.2 Typical Instantaneous Reverse Characteristics

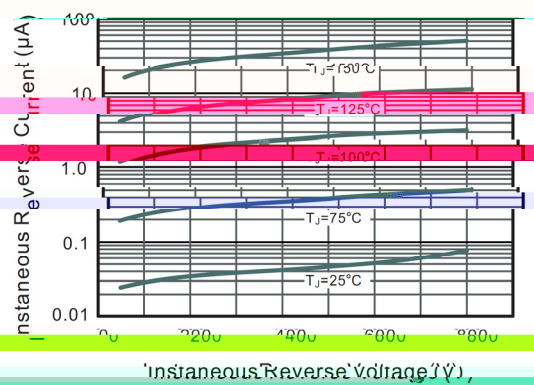


Fig.3 Typical Forward Characteristics

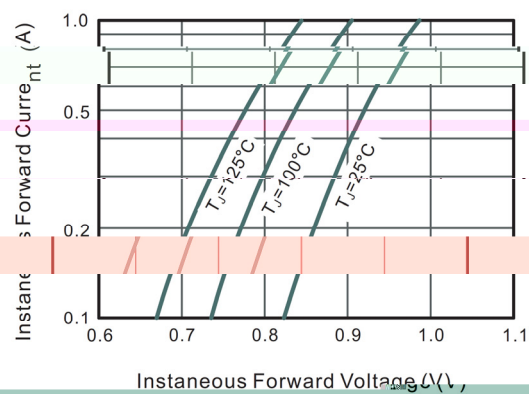


Fig.4 Typical Junction Capacitance



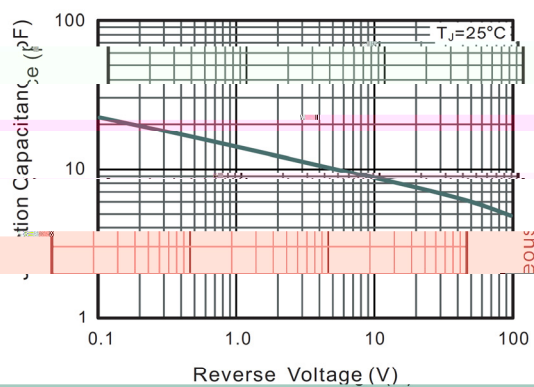



Fig.5 Maximum Non-Repetitive Peak Forward Surge Current

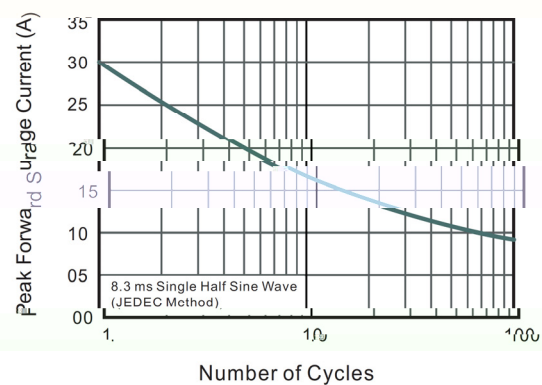

/ Package Dimensions

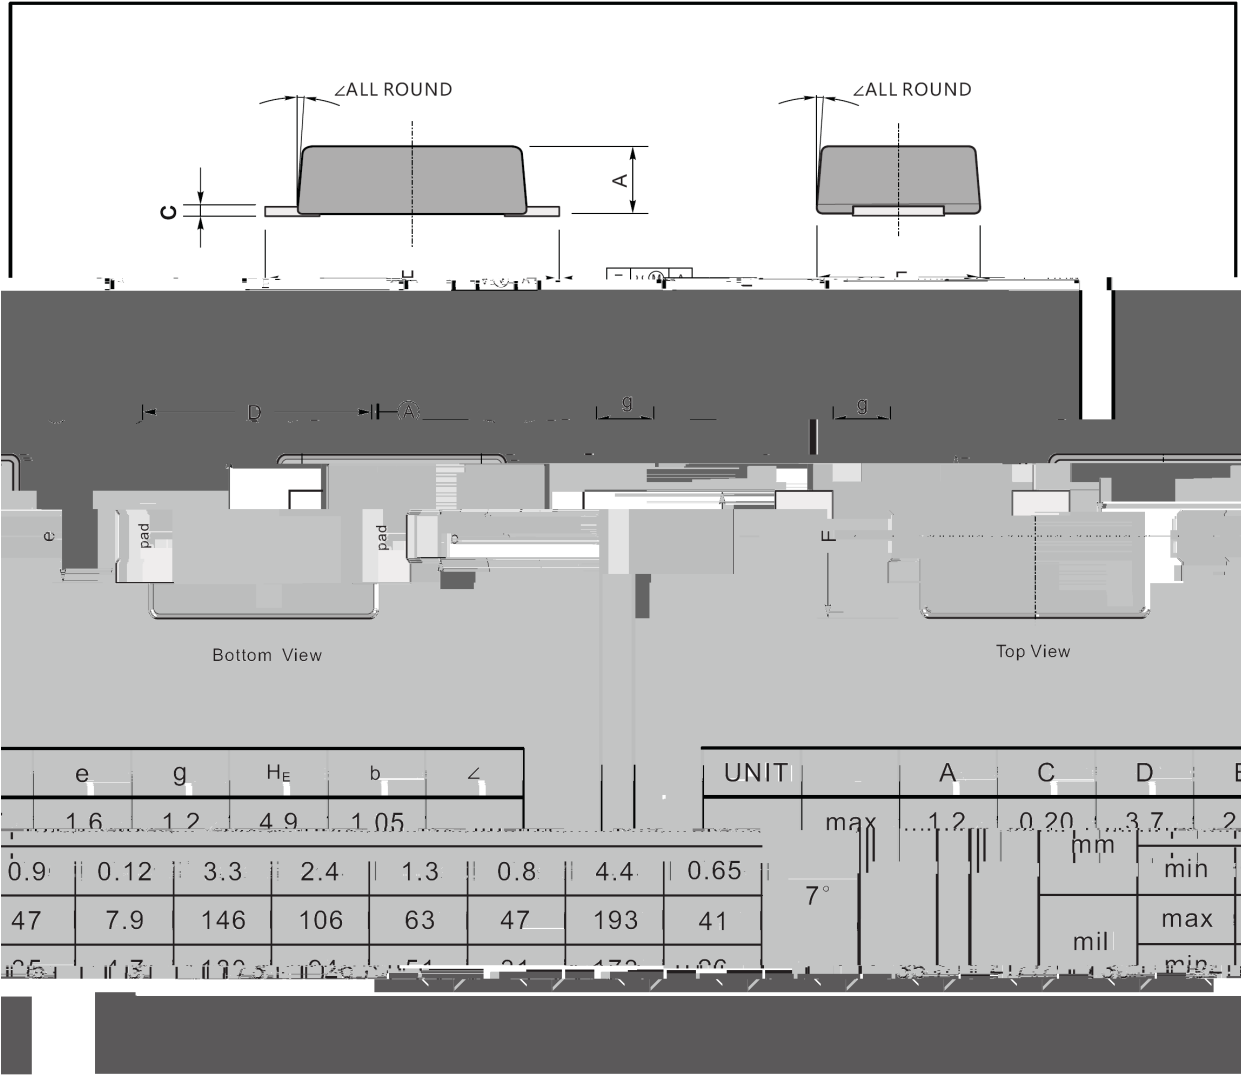

/ Marking Instructions

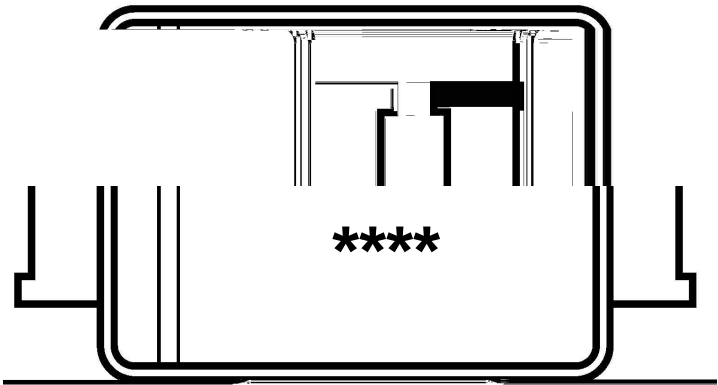


M7

M7

Marking

() /

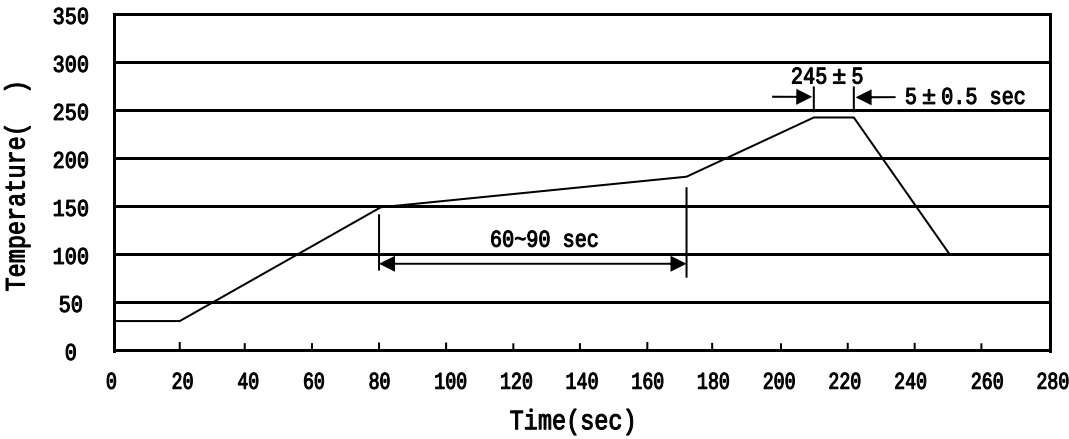

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

						"		

/ Notices