

/ Descriptions

WR0596 M M E 8 g 11 1


/ Features

Ω α H i ω ' 2 i η f β


/ Applications

Ω α 2 i η f β 2 3 Ω Ω 11 1 1 Ω 11 1 3 i 11 1

/ Equivalent Circuit



/ Pinning

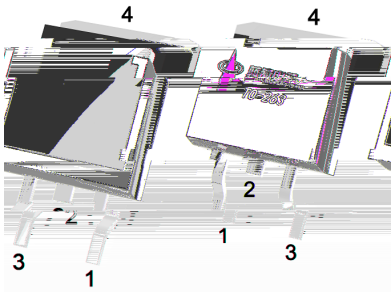

X

X


X

/ Marking


σ M 1 β "

Ƶ "Q	ƶ N	"Q Ө	D H

/ Electrical Characteristic Curve

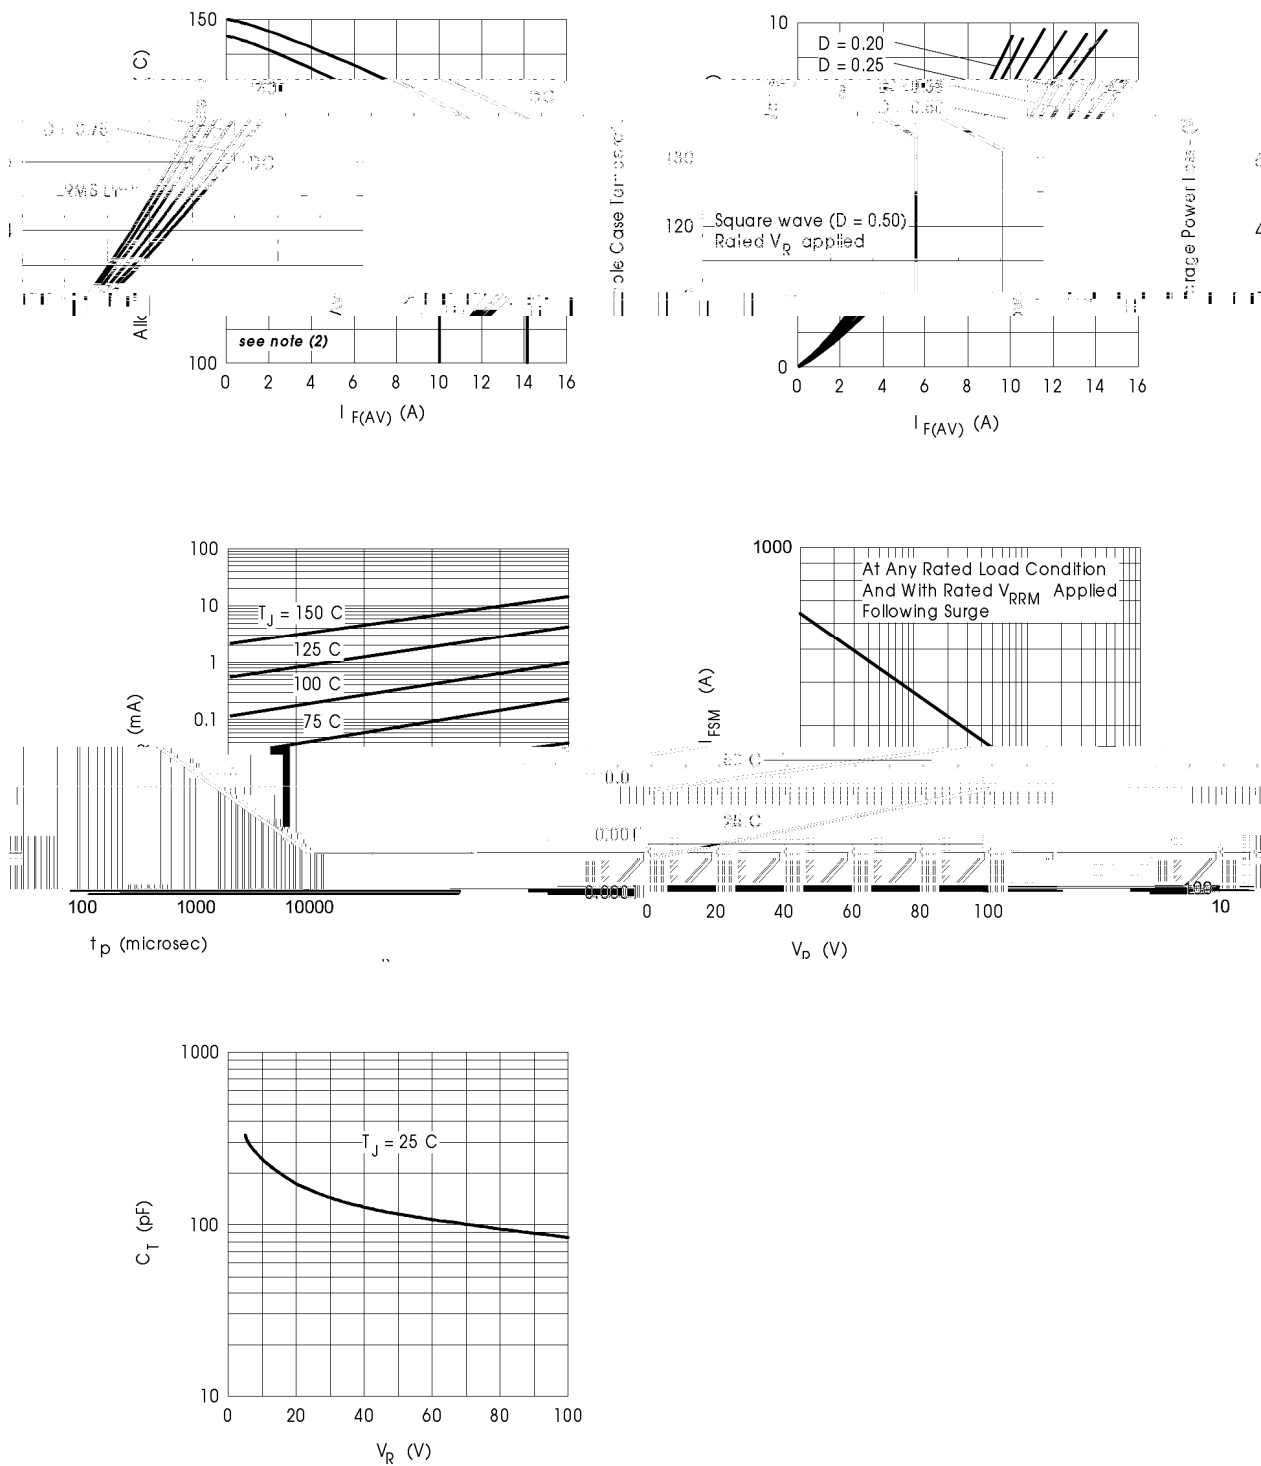


/ Package Dimensions

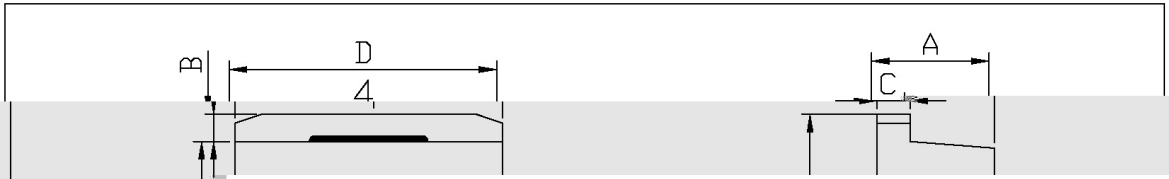

单位: mm

Symbol	Dimensions in Millimeters		Symbol	Dimensions in Millimeters	
	Min	Max		Min	Max
A	4.30	4.70	E	9.00	9.40
B	1.00	1.40	e1	2.24	2.74
b1	0.70	0.90	e2	4.88	5.38
b2	1.15	1.35	J1	15.00	15.50
C	0.40	0.60	L2	2.24	2.74
D	1.20	1.40	L3	1.20	1.40
	9.80	10.20			


/ Marking Instructions

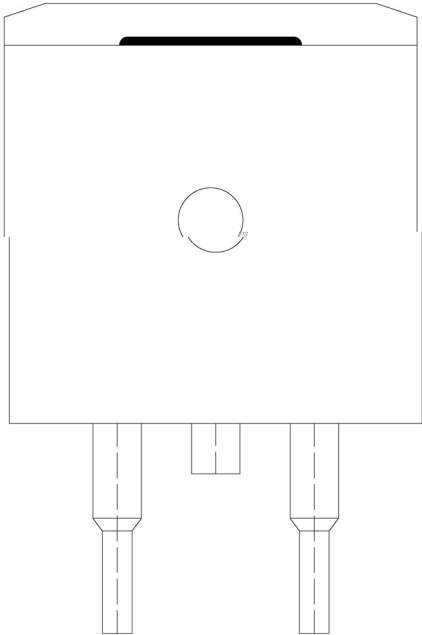

EU	
PEUE53433	
FW	

X

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

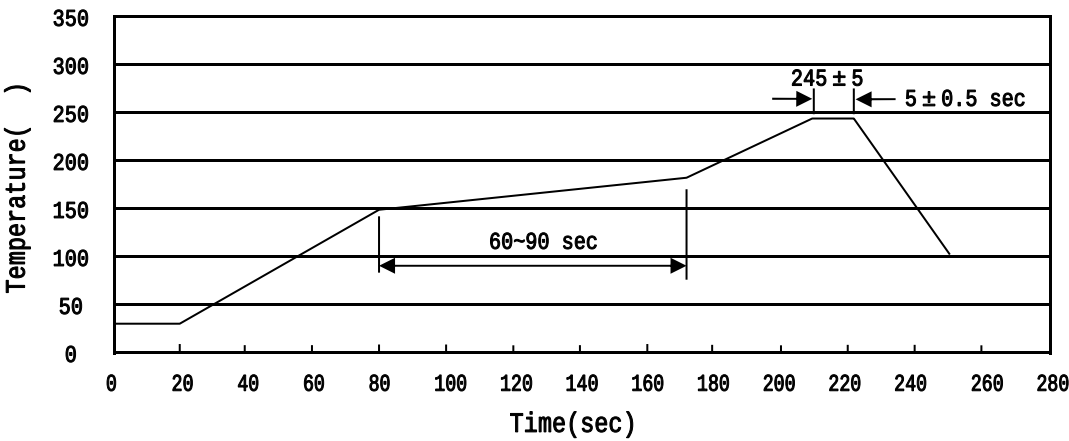

1. 温度曲线

2. 温度曲线

3. 温度曲线

4. 温度曲线

/ Resistance to Soldering Heat Test Conditions

1. 温度曲线

/ Packaging SPEC.

1. 温度曲线

1. 温度曲线

/ Notices