



/ Revised record

/ Descriptions


Schottky Diode in a TO-263 Plastic Package.

/ Features

Low power loss, high efficiency. HF product.

/ Applications

For use in low voltage,high frequency inverters, free wheeling, and polarity protection applications.

/ Equivalent Circuit**/ Pinning**

PIN1 Anode

PIN 2 4 Cathode

PIN 3 Anode

/ h_{FE} Classifications & Marking

See Marking Instructions.


/ Absolute Maximum Ratings(Ta=25)

Parameter	Symbol	Rating	Unit
Peak Repetitive Reverse Voltage	V_{RRM}	150	V
RMS Forward Current	$I_{F(RMS)}$	30	A
Average Rectified Forward Current	$I_{F(AV)}$	10	A
	$I_{F(AV) \text{ total}}$	20	A
Non-Repetitive Peak Forward Surge Current	I_{FSM}	180	A
Thermal Resistance Junction to Case	R	2.2	/W
Junction Temperature Range	T_J	150	
Storage Temperature Range	T_{stg}	-55 150	


/ Electrical Characteristics(Ta=25)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Forward Voltage	V_F	$I_F=10A(T_C=25)$			0.92	V
		$I_F=10A(T_C=125)$		0.69	0.75	V
		$I_F=20A(T_C=25)$			1.0	V
		$I_F=20A(T_C=125)$		0.79	0.86	V
Instantaneous Reverse Current	I_R	$V_R=150V(T_C=25)$			5.0	uA
		$V_R=150V(T_C=125)$			5.0	mA
Voltage Rate of Change	dv/dt				10000	


/ Electrical Characteristic Curve

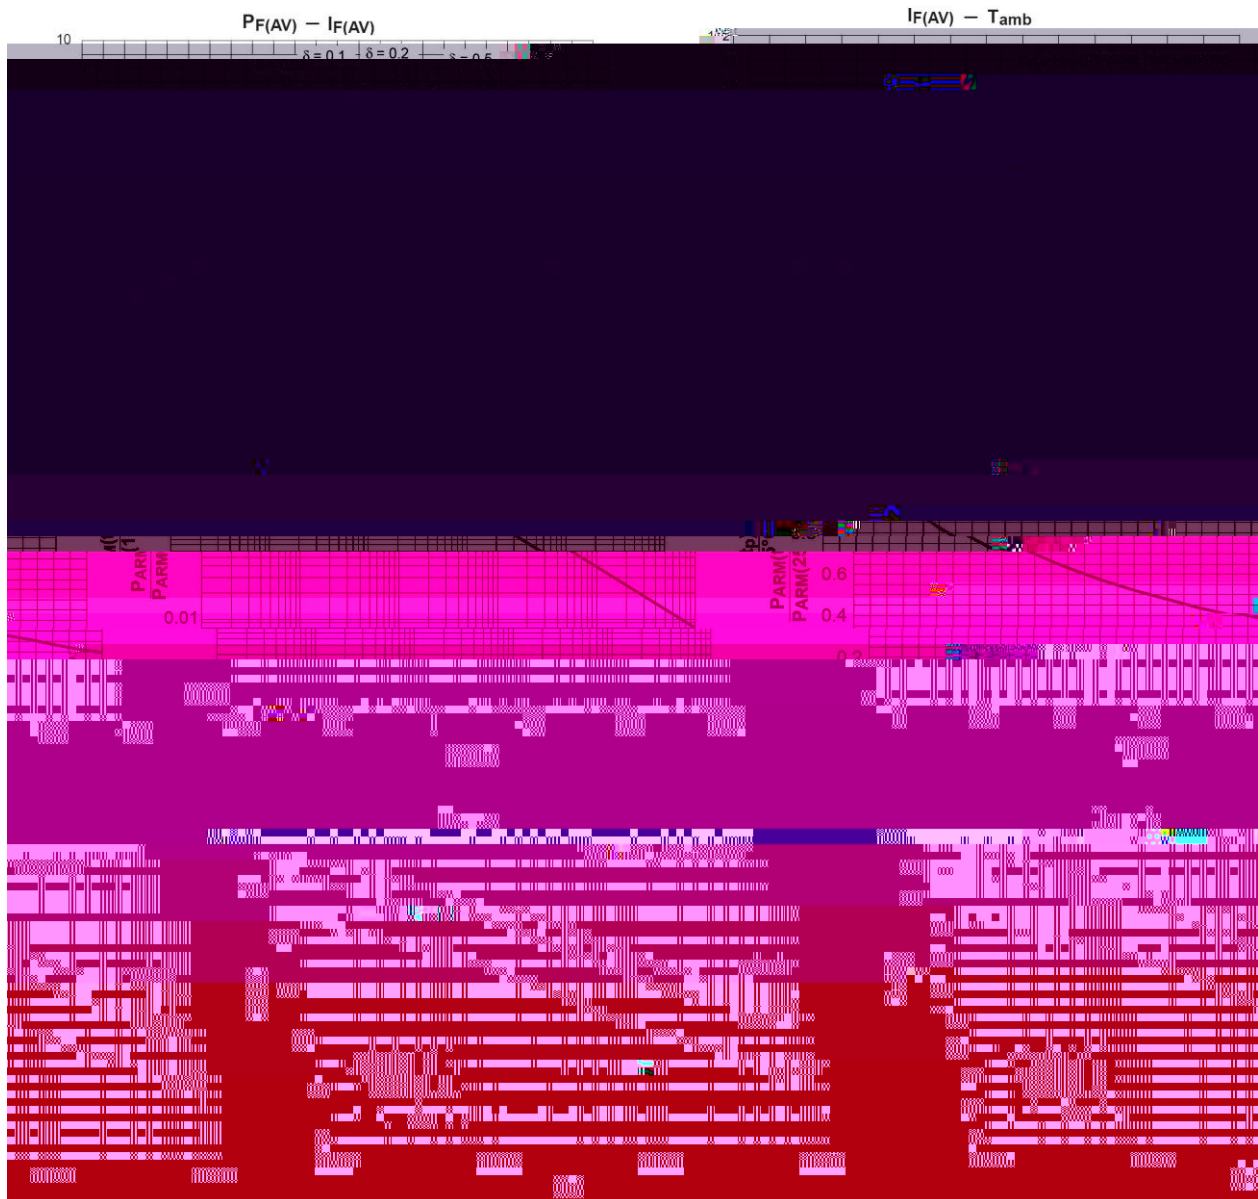

/ Electrical Characteristic Curve

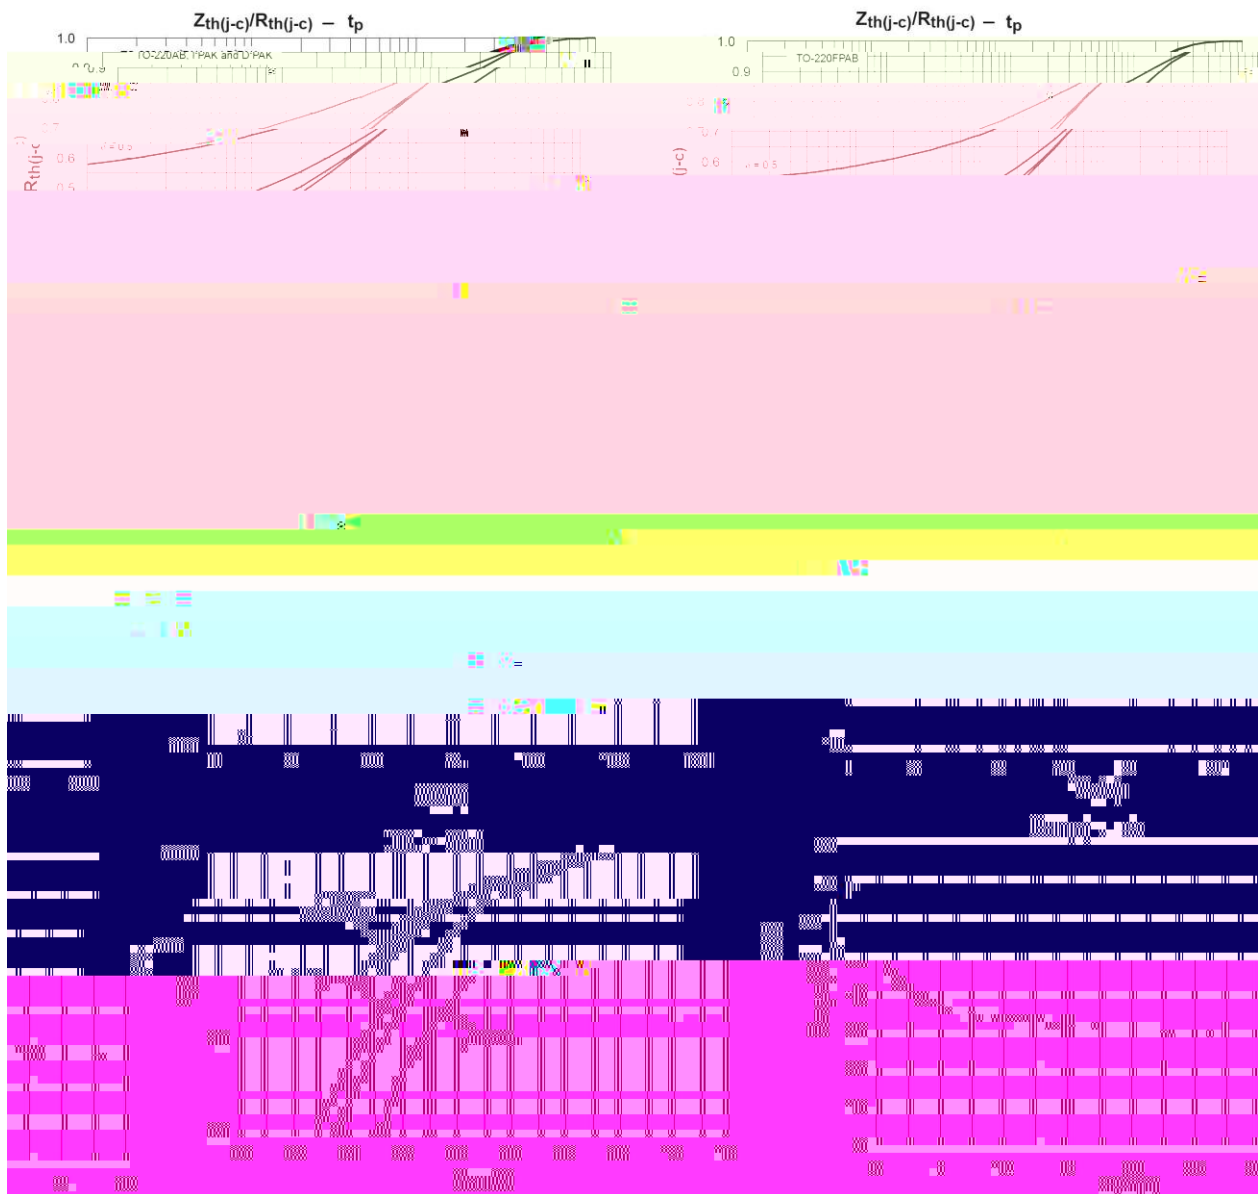

/ Package Dimensions

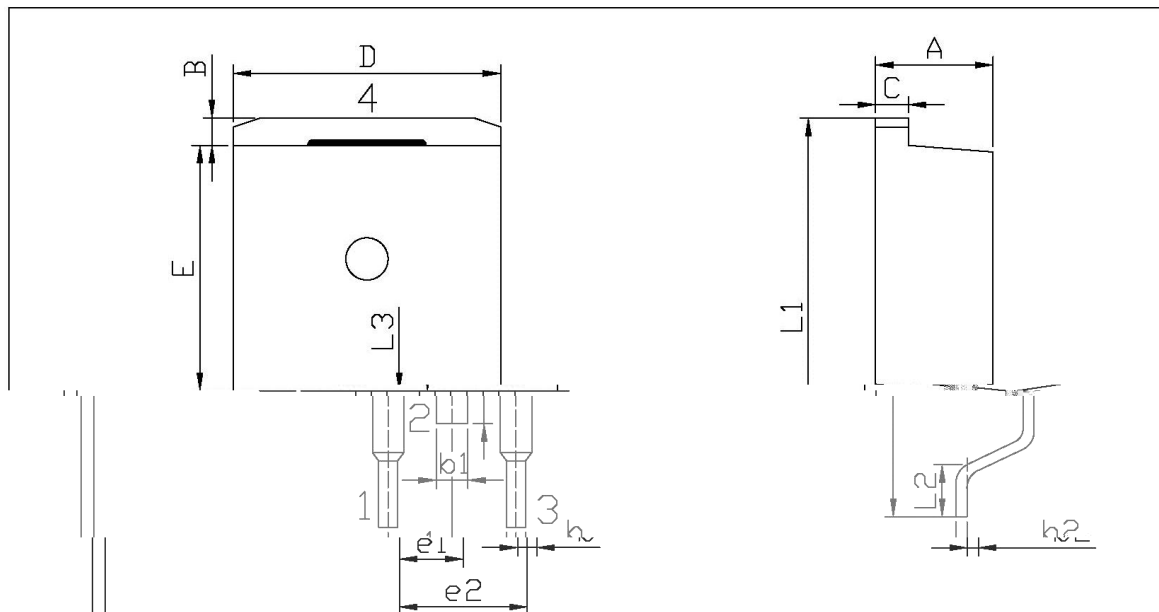


单位: mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeter	
	Min	Max		Min	Max
A	4.30	4.70	E	9.00	9.40
R	1.00	1.40	e1	2.40	2.80
b	0.70	0.90	e2	4.88	
b1	1.15	1.35	L1	10.00	
b2	0.40	0.60	L2		
C	1.20	1.40	L3		
D	9.80	10.20	L4		
L1			L5		
L2			L6		
L3			L7		
L4			L8		
L5			L9		
L6			L10		
L7			L11		
L8			L12		
L9			L13		
L10			L14		
L11			L15		
L12			L16		
L13			L17		
L14			L18		
L15			L19		
L16			L20		
L17			L21		
L18			L22		
L19			L23		
L20			L24		
L21			L25		
L22			L26		
L23			L27		
L24			L28		
L25			L29		
L26			L30		
L27			L31		
L28			L32		
L29			L33		
L30			L34		
L31			L35		
L32			L36		
L33			L37		
L34			L38		
L35			L39		
L36			L40		
L37			L41		
L38			L42		
L39			L43		
L40			L44		
L41			L45		
L42			L46		
L43			L47		
L44			L48		
L45			L49		
L46			L50		
L47			L51		
L48			L52		
L49			L53		
L50			L54		
L51			L55		
L52			L56		
L53			L57		
L54			L58		
L55			L59		
L56			L60		
L57			L61		
L58			L62		
L59			L63		
L60			L64		
L61			L65		
L62			L66		
L63			L67		
L64			L68		
L65			L69		
L66			L70		
L67			L71		
L68			L72		
L69			L73		
L70			L74		
L71			L75		
L72			L76		
L73			L77		
L74			L78		
L75			L79		
L76			L80		
L77			L81		
L78			L82		
L79			L83		
L80			L84		
L81			L85		
L82			L86		
L83			L87		
L84			L88		
L85			L89		
L86			L90		
L87			L91		
L88			L92		
L89			L93		
L90			L94		
L91			L95		
L92			L96		
L93			L97		
L94			L98		
L95			L99		
L96			L100		
L97			L101		
L98			L102		
L99			L103		
L100			L104		
L101			L105		
L102			L106		
L103			L107		
L104			L108		
L105			L109		
L106			L110		
L107			L111		
L108			L112		
L109			L113		
L110			L114		
L111			L115		
L112			L116		
L113			L117		
L114			L118		
L115			L119		
L116			L120		
L117			L121		
L118			L122		
L119			L123		
L120			L124		
L121			L125		
L122			L126		
L123			L127		
L124			L128		
L125			L129		
L126			L130		
L127			L131		
L128			L132		
L129			L133		
L130			L134		
L131			L135		
L132			L136		
L133			L137		
L134			L138		
L135			L139		
L136			L140		
L137			L141		
L138			L142		
L139			L143		
L140			L144		
L141			L145		
L142			L146		
L143			L147		
L144			L148		
L145			L149		
L146			L150		
L147			L151		
L148			L152		
L149			L153		
L150			L154		
L151			L155		
L152			L156		
L153			L157		
L154			L158		
L155			L159		
L156			L160		
L157			L161		
L158			L162		
L159			L163		
L160			L164		
L161			L165		
L162			L166		
L163			L167		
L164			L168		
L165			L169		
L166			L170		
L167			L171		
L168			L172		
L169			L173		
L170			L174		
L171			L175		
L172			L176		
L173			L177		
L174			L178		
L175			L179		
L176			L180		
L177			L181		
L178			L182		
L179			L183		
L180			L184		
L181			L185		
L182			L186		
L183			L187		
L184			L188		
L185			L189		
L186			L190		
L187			L191		
L188			L192		
L189			L193		
L190			L194		
L191			L195		
L192			L196		
L193			L197		
L194			L198		
L195			L199		
L196			L200		
L197			L201		
L198			L202		
L199			L203		
L200			L204		
L201			L205		
L202			L206		
L203			L207		
L204			L208		
L205			L209		
L206			L210		
L207			L211		
L208			L212		
L209			L213		
L210			L214		
L211			L215		
L212			L216		
L213			L217		
L214			L218		
L215			L219		
L216			L220		
L217			L221		
L218			L222		
L219			L223		
L220			L224		
L221			L225		
L222			L226		
L223			L227		
L224			L228		
L225			L229		
L226			L230		
L227			L231		
L228			L232		
L229			L233		
L230			L234		
L231			L235		
L232			L236		
L233			L237		
L234			L238		
L235			L239		
L236			L240		
L237			L241		
L238			L242		
L239			L243		
L240			L244		
L241			L245		
L242			L246		
L243			L247		
L244			L248		
L245			L249		
L246			L250		
L247			L251		
L248			L252		
L249			L253		
L250			L254		
L251			L255		
L252			L256		
L253			L257		
L254			L258		
L255			L259		
L256			L260		
L257			L261		
L258			L262		
L259			L263		
L260			L264		
L261			L265		
L262			L266		
L263			L267		
L264			L268		
L265			L269		
L266			L270		
L267			L271		
L268			L272		
L269			L273		
L270			L274		
L271			L275		
L272			L276		
L273			L277		
L274			L278		
L275			L279		
L276			L280		
L277			L281		
L278			L282		
L279			L283		
L280			L284		
L281			L285		
L282			L286		
L283			L287		
L284			L288		
L285			L289		
L286			L290		
L287			L291		
L288			L292		
L289			L293		
L290			L294		
L291			L295		
L292			L296		
L293			L297		
L294			L298		
L295			L299		
L296			L300		
L297			L301		
L298			L302		
L299			L303		
L300			L304		
L301			L305		
L302			L306		
L303			L307		
L304			L308		
L305			L309		
L306			L310		



/ Marking Instructions

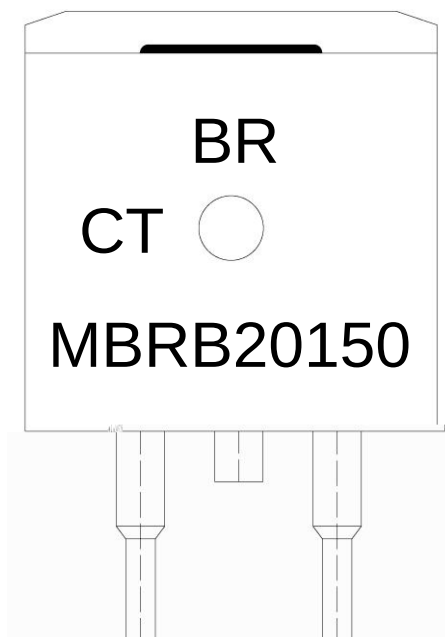

Note:


BR: Company Code

MBRB20150 Product Type.

CT: Internal Structure

***: Lot No. Code, code change with Lot No.

() / Temperature Profile for Dip Soldering(Pb-Free)



Note:

- | | | | | | |
|---|-----|-----|----|----------|---|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 245 | 5 | 5 | 0.5sec; | 2.Peak Temp.:245 5 , Duration:5 0.5sec. |
| 3 | | | 2 | 10 /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

260	5	10	1 sec.	Temp.:260±5	Time:10±1 sec
-----	---	----	--------	-------------	---------------

/ Packaging SPEC.

/ REEL

Package Type	Units					Dimension (unit mm ³)		

/ TUBE

Package Type	Units					Dimension (unit mm ³)		

/ Notices