


/ Descriptions

TO-252


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

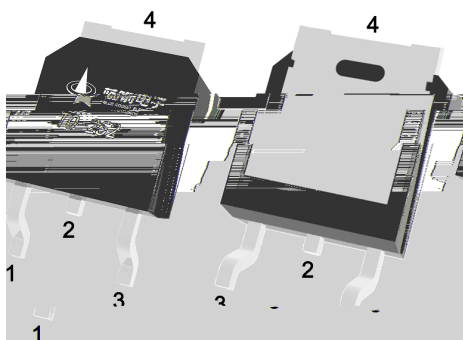

/ Marking





/ Absolute Maximum Ratings(Ta=25)

		×	


/ Electrical Characteristics(Ta=25)

1.
2.

/ Electrical Characteristic Curve

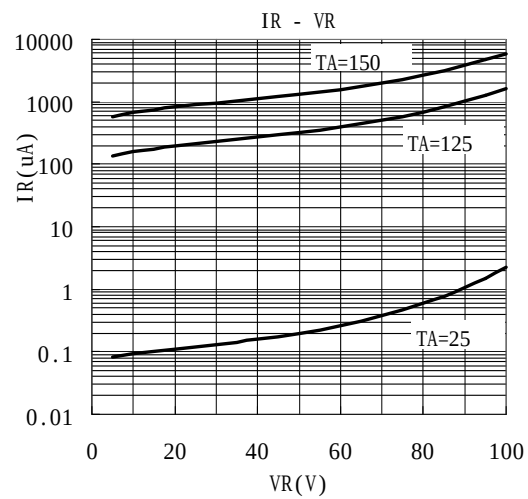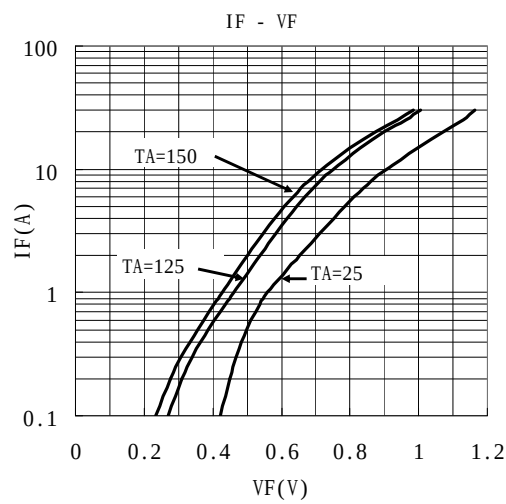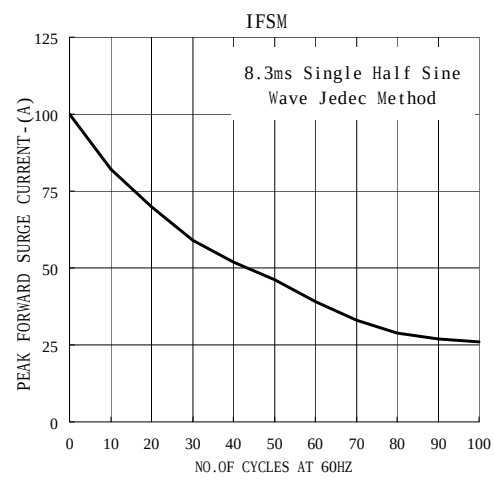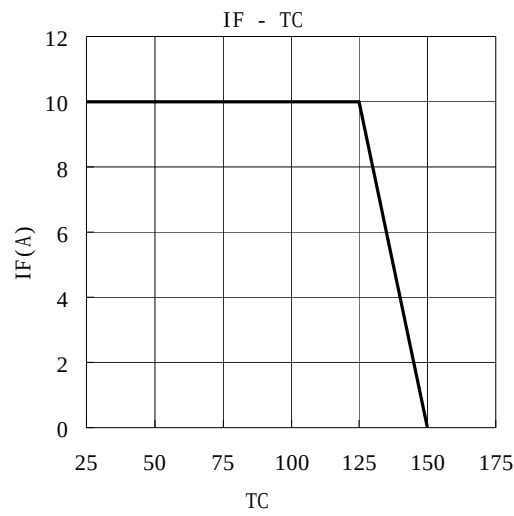

/ Package Dimensions

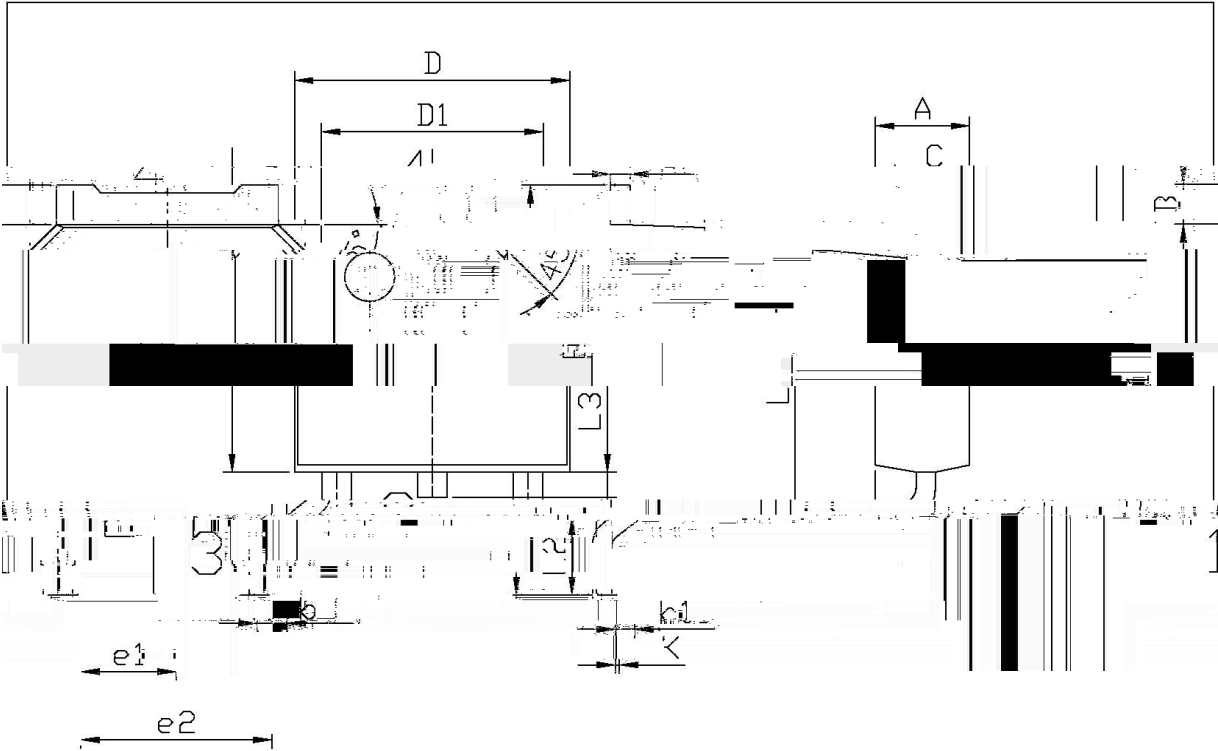


单位: mm

Symbol		Dimensions In Millimeters		Symbol		Dimensions In Millimeters	
		Min	Max			Min	Max
E		5.95	6.25	B		2.20	2.40
e1		2.24	2.34	B1		0.95	1.25
e2		4.43	4.73	b1		0.40	0.60
0.55		L1	9.85	10.35		b1	0.45
0.45		0.45	0.55	L2		1.70	2.00
6.45		6.45	6.75	L3		0.60	0.90
5.10		5.10	5.50	K			

TO-252

/ Marking Instructions

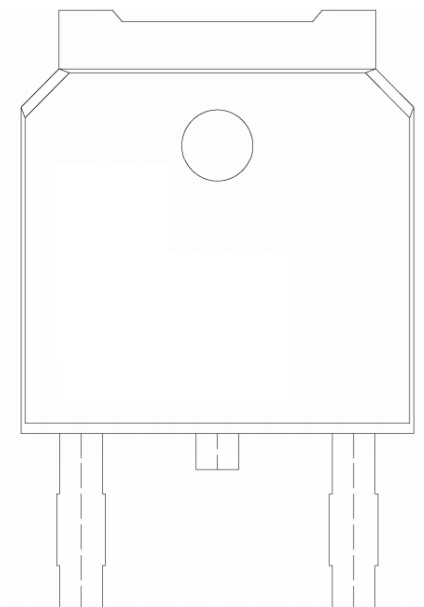


BR

MBRD10100

CT:

Ie d d d

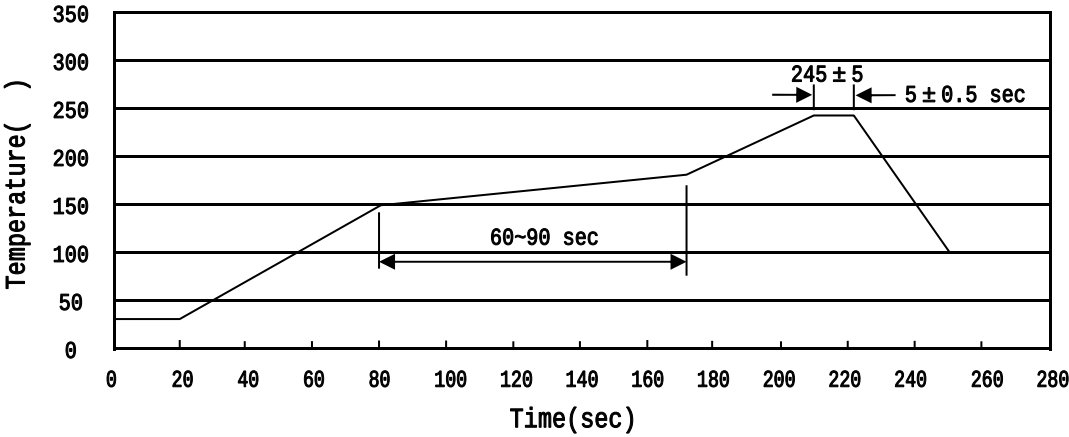

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

/ Notices