
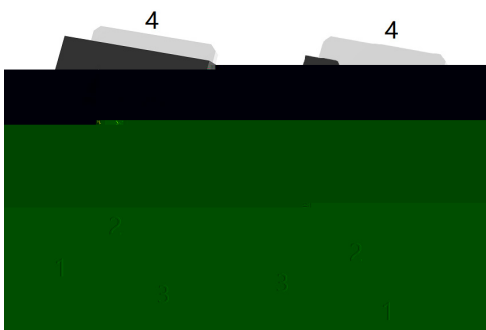


Schottky Diode in a TO-252 Plastic Package.

Low power loss, high efficiency, HF Product.

For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications.



PIN1 Anode

PIN 2,4 Cathode

PIN 3 Anode

See Marking Instructions.






Parameter	Symbol	Rating	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_{RM}	100	V
RMS Reverse Voltage	$V_{R(RMS)}$	70	V
Average Rectified Forward Current	$I_{F(AV)}$ (per leg)	10	A
	$I_{F(AV)}$ total	20	A
Non Repetitive Peak Surge Current	I_{FSM}	150	A
Thermal resistance, junction to case	R_{JC}	6	/W
Junction Temperature Range	$T_{J\ MAX}$	150	
Storage Temperature Range	T_{stg}	-55 150	


Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Reverse Voltage	V_{BR}	$I_R=0.3mA$	100			V
Forward Voltage	V_F	$I_F=10A$ $T_J=25$			0.85	V
		$I_F=10A$ $T_J=125$			0.7	V
		$I_F=20A$ $T_J=25$			0.95	V
		$I_F=20A$ $T_J=125$			0.85	V
Instantaneous Reverse Current	I_R Note 1	$V_R=100V$ $T_J=25$			0.15	mA
		$V_R=70V$ $T_J=125$			1.0	mA
		$V_R=100V$ $T_J=125$			150	mA

/Notes

/Short duration pulse test used to minimize self-heating effect.

/ Unless otherwise noted, values for the parameters of a single chip

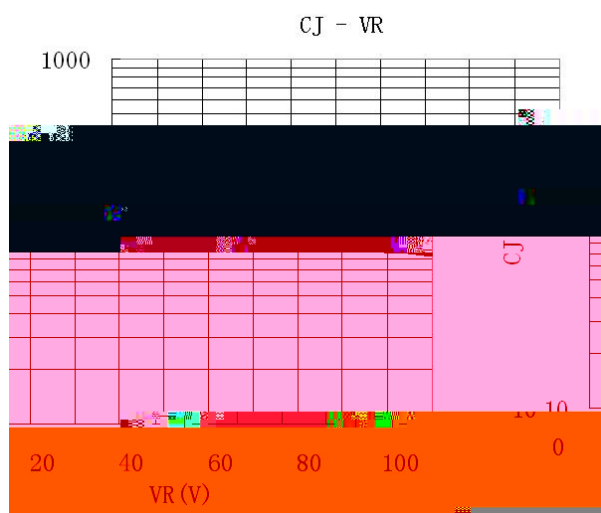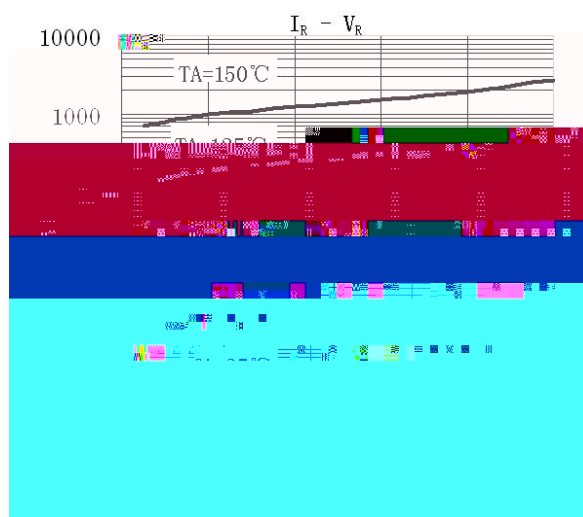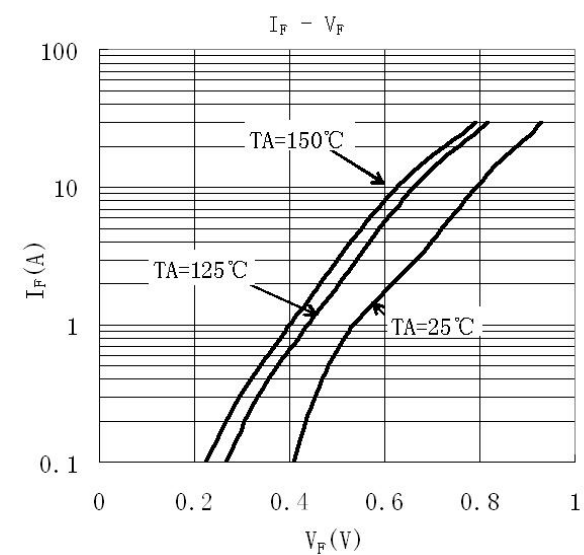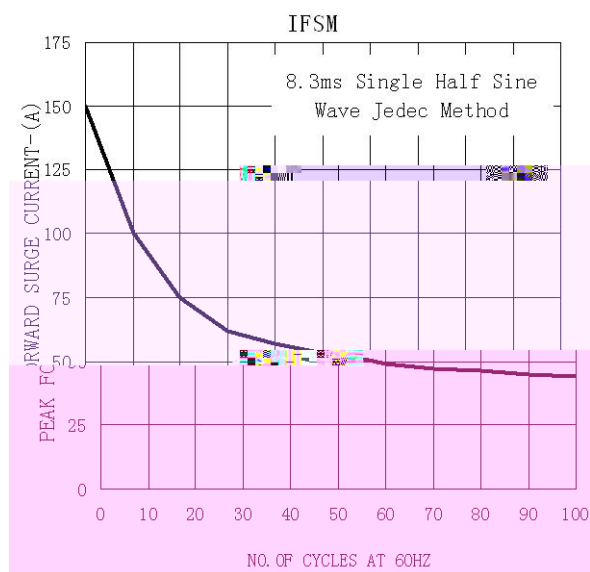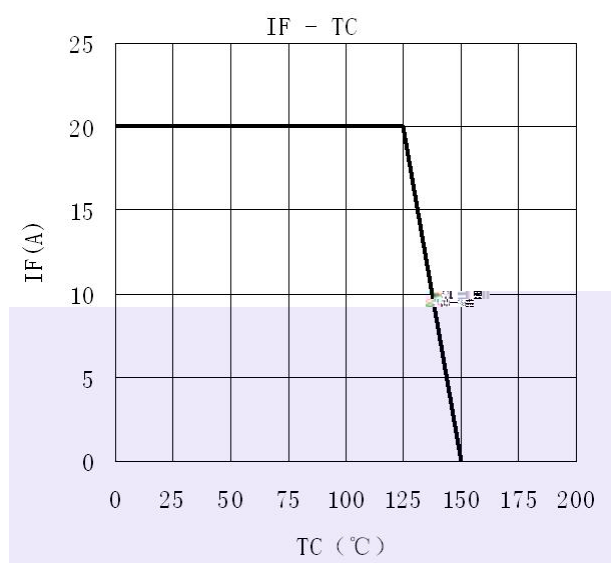


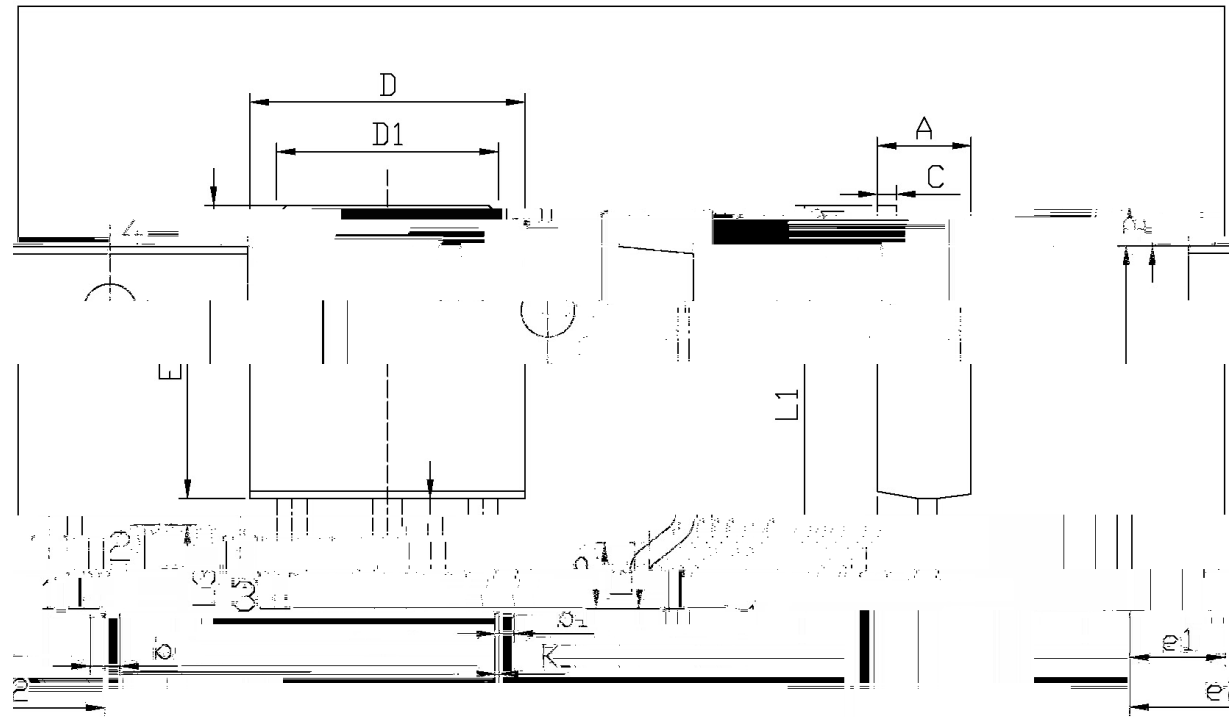


单位: mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
A	2.20	2.40	E	5.95	6.25
B	0.95	1.25	e1	2.24	2.34
b	0.50	0.90	e2	4.43	4.73
b1	0.45	0.55	L1	9.45	9.95
C	0.45	0.55	L2	1.25	1.75
D	6.45	6.75	L3	0.60	0.90
D1	5.10	5.50	K	0.00	0.10

TO-252

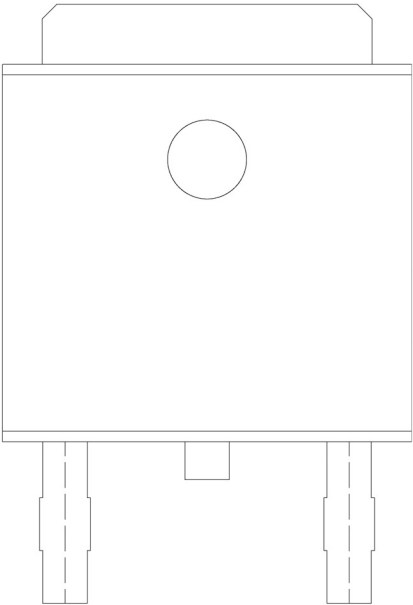

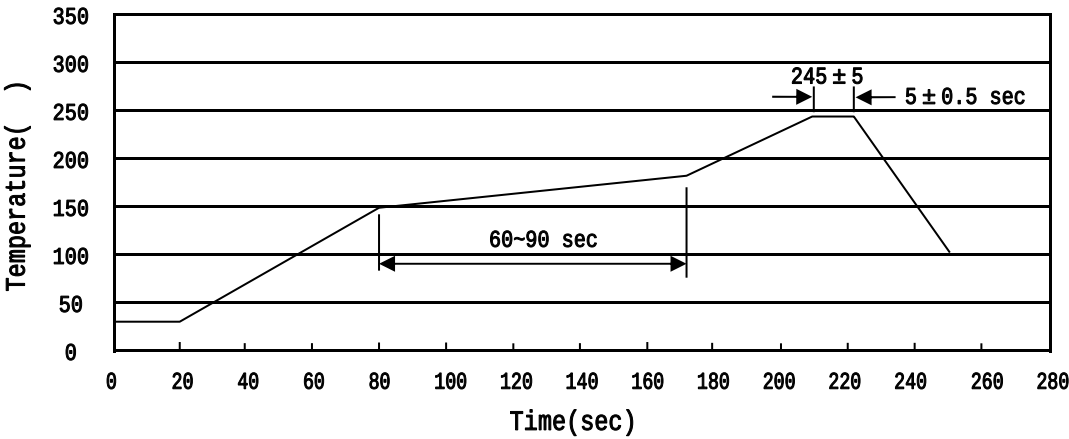

Note:

- 1

150 180

60 90sec;

1.Preheating:150~180 , Time:60~90sec.
- 2

245 5

5 0.5sec;

2.Peak Temp.:245 5 , Duration:5 0.5sec.
- 3

2 10 /sec.

3. Cooling Speed: 2~10 /sec.

260 5

10 1 sec.

Temp.:260±5

Time:10±1 sec

/ REEL

Package Type	Units					Dimension (unit mm ³)		
TO-252	2,500	2	5,000	6	30,000	13 ×16	360×360×50	380×335×366

/ TUBE

Package Type	Units					Dimension (unit mm ³)		
TO-251/252	75	48	3,600	5	18,000	526×20.5×5.25	555×164×50	575×290×180