


TO-252











|  |     |   |   |
|--|-----|---|---|
|  |     |   |   |
|  |     |   |   |
|  |     |   |   |
|  |     |   |   |
|  | ( ) |   |   |
|  |     |   |   |
|  | θ   |   | ℃ |
|  |     |   | ℃ |
|  |     | ~ | ℃ |



|  |  |   |  |  |  |   |
|--|--|---|--|--|--|---|
|  |  |   |  |  |  |   |
|  |  | ℃ |  |  |  |   |
|  |  | ℃ |  |  |  |   |
|  |  | ℃ |  |  |  |   |
|  |  | ℃ |  |  |  |   |
|  |  | ℃ |  |  |  |   |
|  |  | ℃ |  |  |  |   |
|  |  |   |  |  |  | μ |

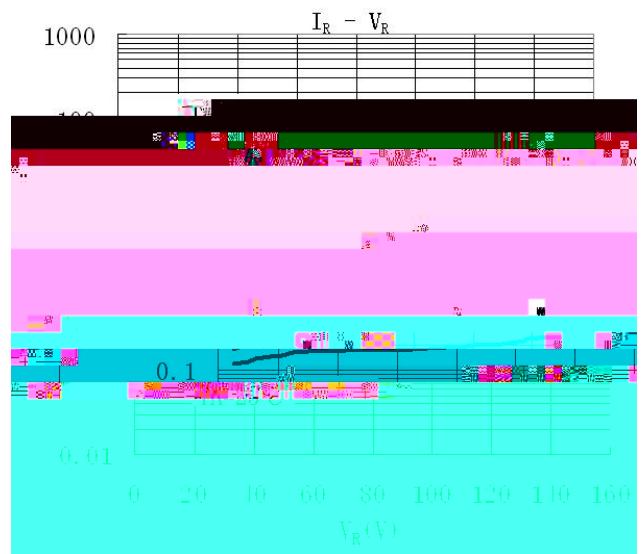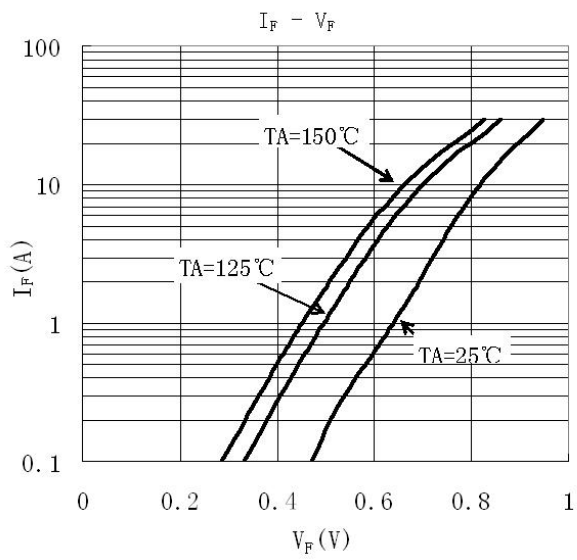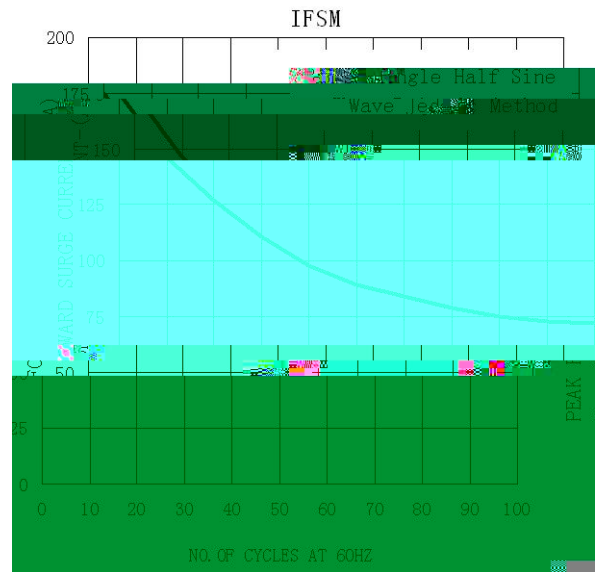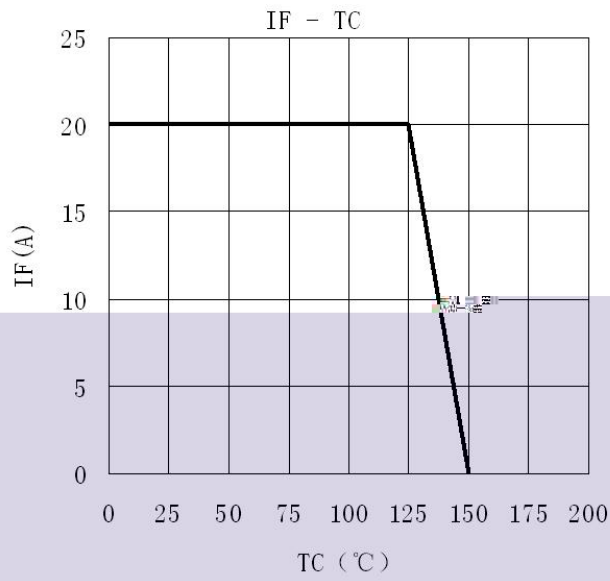

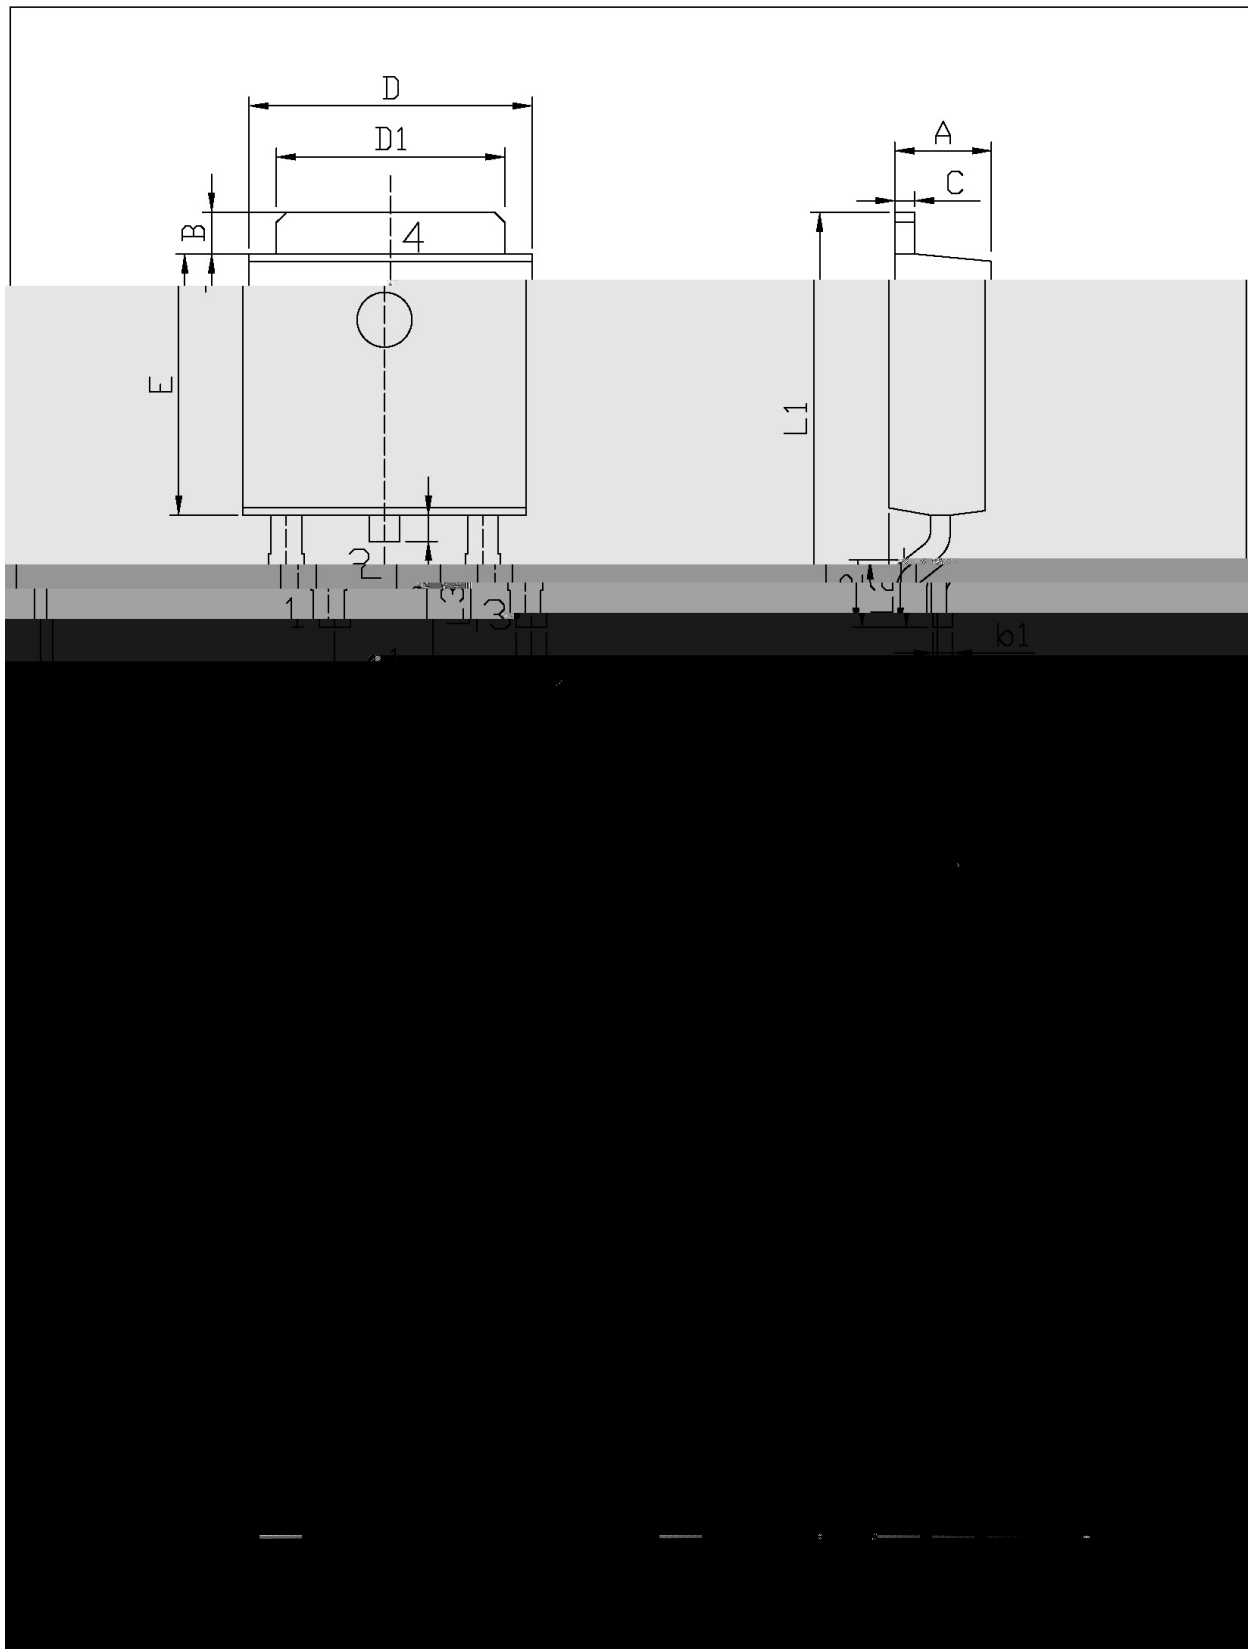

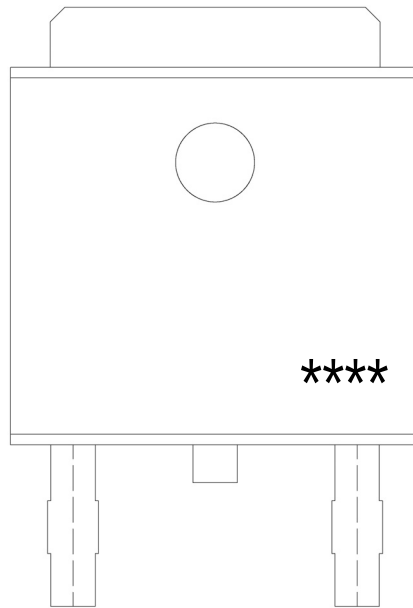


BR

MBRD20150

CT:

\*\*\*\*

Temperature Profile for IR Reflow Soldering(Pb-Free)

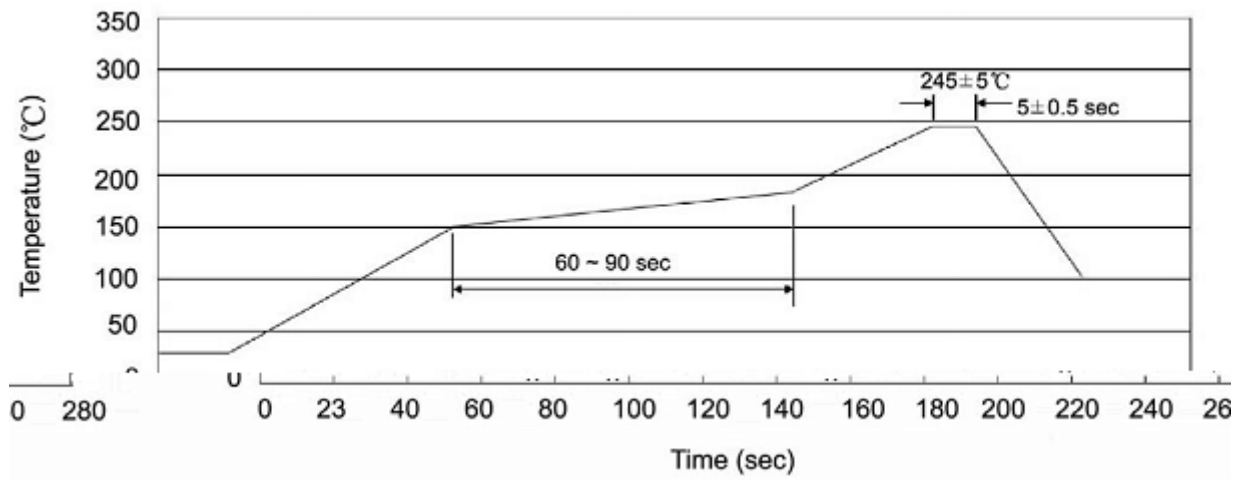

± ± ± ±

± ± °C

|        | Units/Reel<br>/ | Reels/Inner Box<br>/ | Units/Inner Box<br>/ | Inner Boxes/Outer Box<br>/ | Units/Outer Box<br>/ | Reel    | Inner Box  | Outer Box   |
|--------|-----------------|----------------------|----------------------|----------------------------|----------------------|---------|------------|-------------|
| TO-252 | 2,500           | 2                    | 5,000                | 5                          | 25,000               | 13" ×16 | 360×360×50 | 385×257×392 |

|            | Units/Tube<br>/ | Tubes/Inner Box<br>/ | Units/Inner Box<br>/ | Inner Boxes/Outer Box<br>/ | Units/Outer Box<br>/ | Tube          | Inner Box  | Outer Box   |
|------------|-----------------|----------------------|----------------------|----------------------------|----------------------|---------------|------------|-------------|
| TO-251/252 | 75              | 48                   | 3,600                | 5                          | 18,000               | 526×20.5×5.25 | 555×164×50 | 575×290×180 |