

/ Descriptions

/ Features


2.4V-110V

200mW

/ Applications

200mW SOD-323

/ Equivalent Circuit



/ Pinning









/ h_{FE} Classifications & Marking

MMSZ52XXBS




DATA SHEET


/ Electrical Characteristic Curve

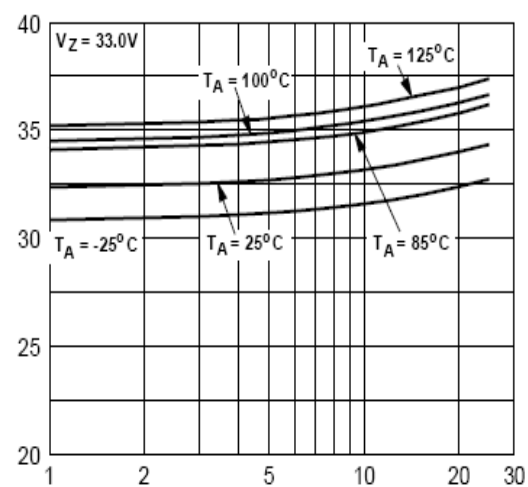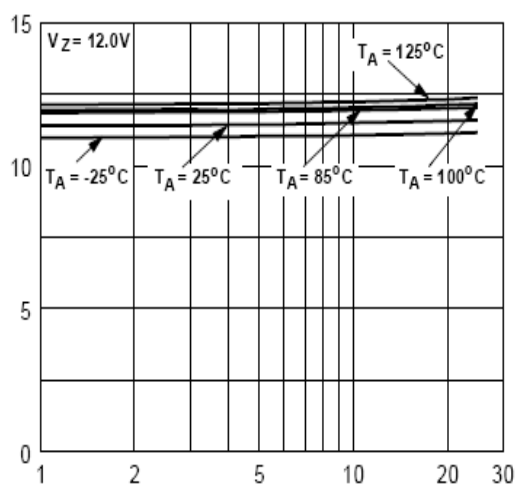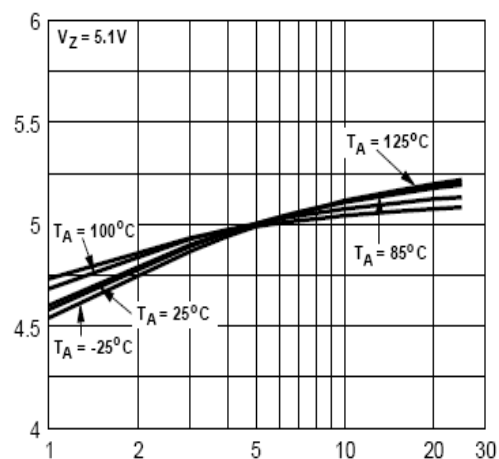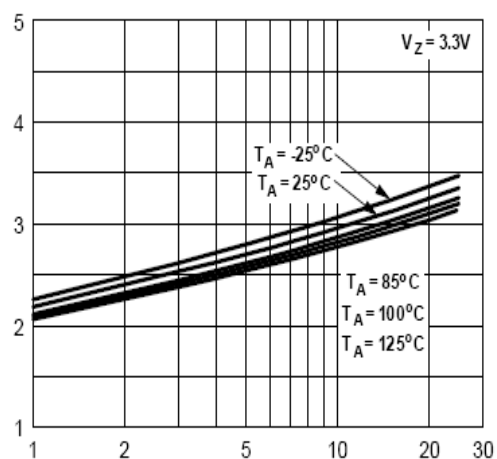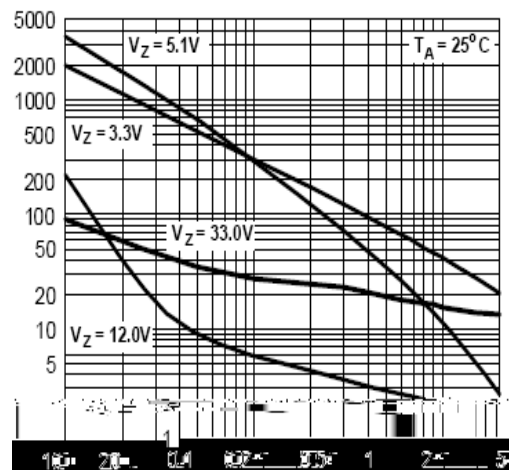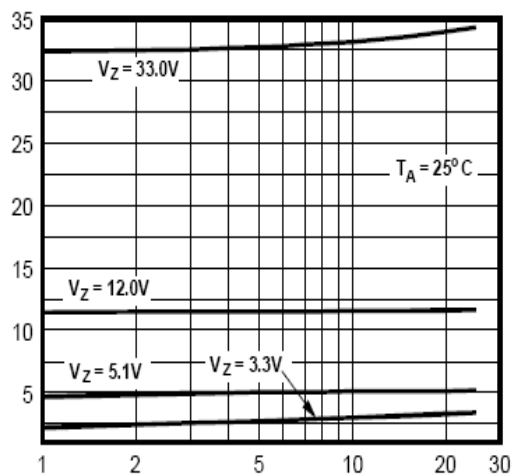

/ Package Dimensions

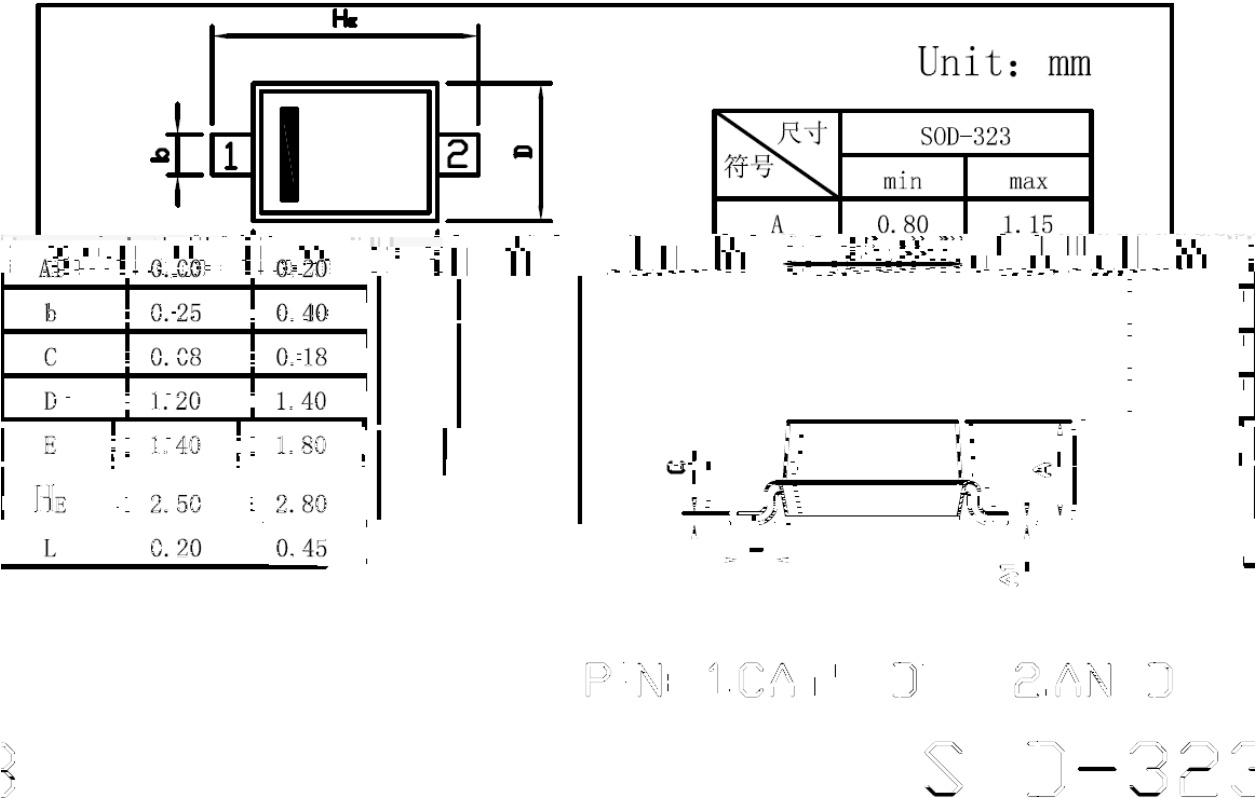


/ Marking Instructions

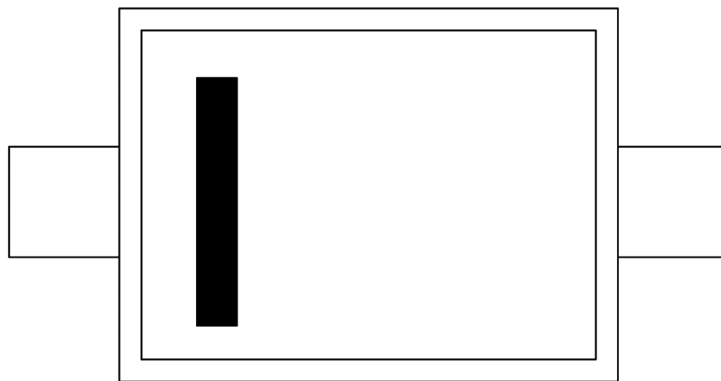

H
H2

() /

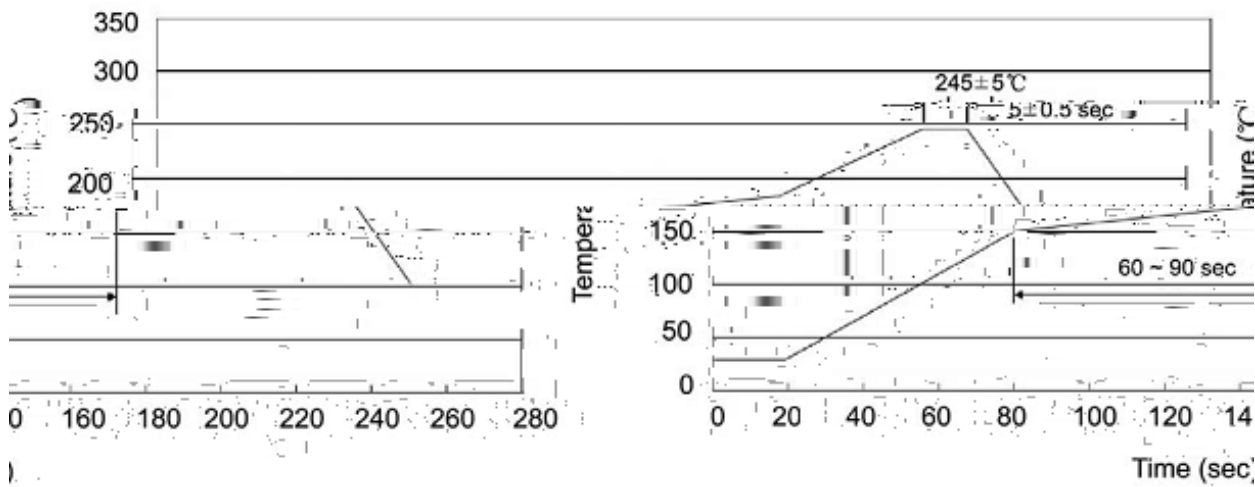

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± ± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱

/ Notices