

Rev.A May.-2018

٢٠

50V~1000V

2.0A SMB

Surface Mount General Purpose Silicon Rectifiers, Reverse Voltage: 50 to 1000V, Forward Current: 2.0A, SMB package.

• È

RoHS

2011/65/EU

Glass Passivated Chip Junction, Fast reverse recovery time, Lead free in comply with EU RoHS 2011/65/EU directives, For surface mounted applications. Halogen free product.

٧ ٢

General purpose.

٧ ٢ ٢ = ٢




٢ ١ ٢



PIN	DESCRIPTION
1	Cathode
2	Anode

The recommended mounting pad size

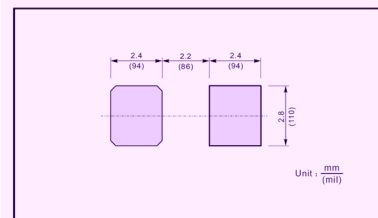

٢. ٢ ٢

See Marking Instructions.

Rev.A May.-2018

Parameter	Symbol	Rating							Unit
		S2AB	S2BB	S2DB	S2GB	S2JB	S2KB	S2MB	
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V

Rev.A May.-2018

REV A

Fig.1 Forward Current Derating Curve


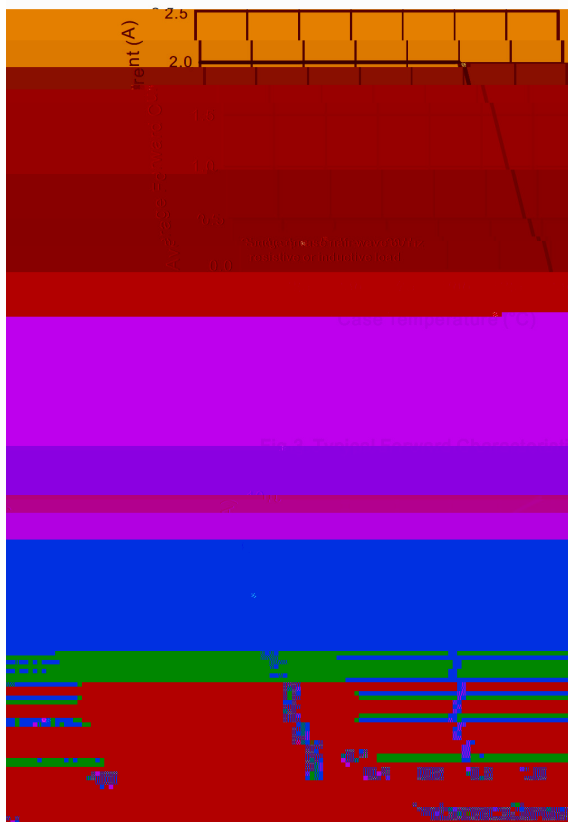



Fig.2 Typical Instantaneous Reverse Characteristics

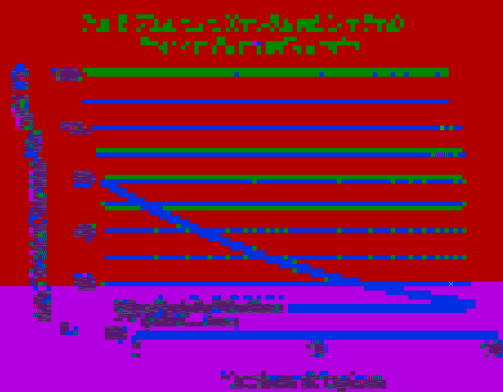

Rev.A May.-2018

蓝箭电子

SMB

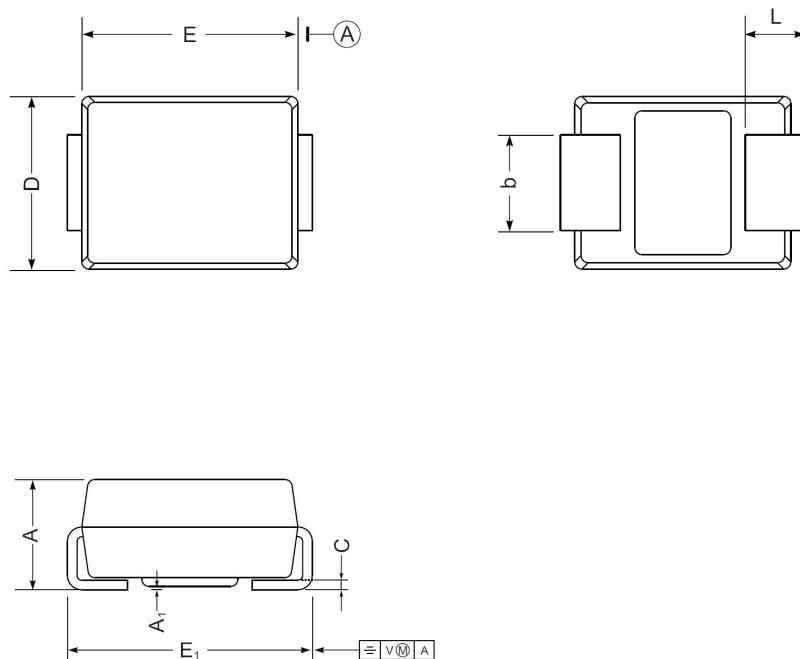


SMB mechanical data

UNIT		A	E	D	E ₁	A ₁	L	C	b
	max	2.44	4.70	3.94	5.59	0.20	1.50	0.305	2.2
mm	min	2.13	4.06	3.3	5.08	0.05	0.8	0.152	1.9
	max	96	185	155	220	7.9	59	12	87
mil	min	84	160	130	200	2.0	32	6	75

4. LQ

Marking	
Type number	Marking code
S2AR	S2A
S2BB	S2B
S2DB	S2D
S2GB	S2G
S2IB	S2I
S2KB	S2K
S2MB	S2M

4. L^Q

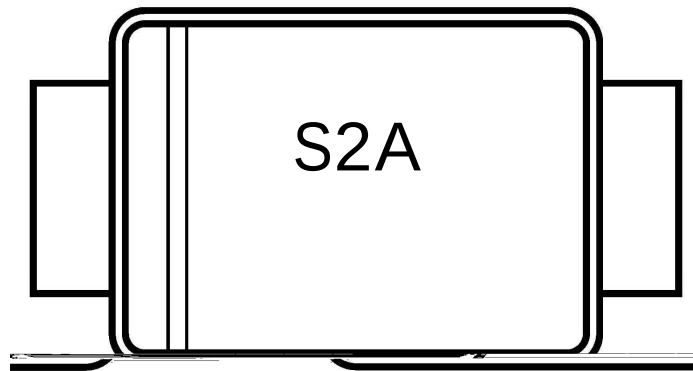

S2A

1 *

3 *


Note:

S2A Product Type Code

**** Lot No. Code The 1st * means:YM Code The last 3 * means:little Lot No
Code

Rev.A May.-2018

Whp shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0l uhh,

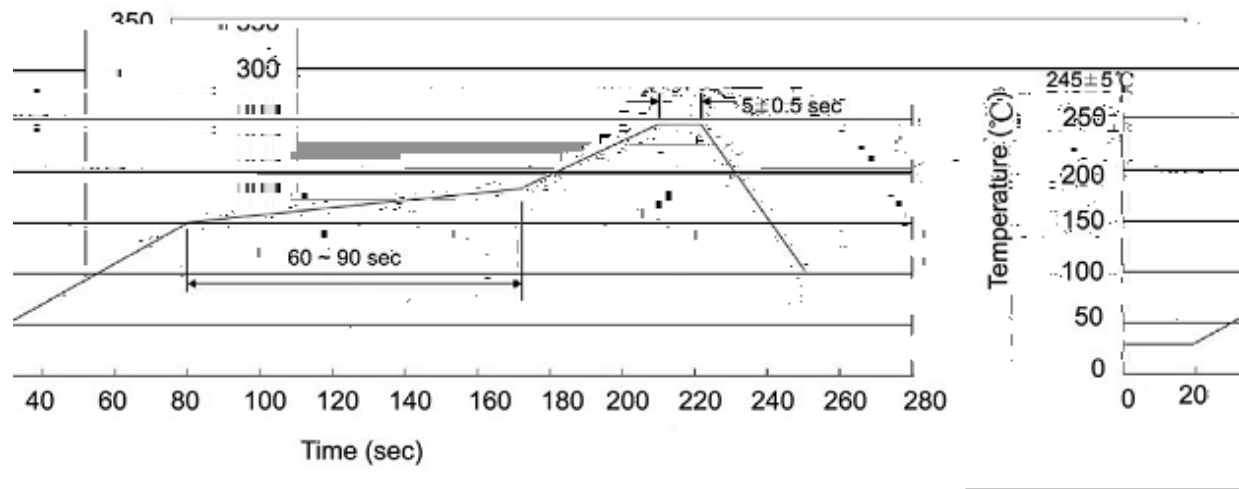

Note:

- | | | | | | |
|---|-------|-----|-----------|--------|---|
| 1 | 150 | 180 | 60 | 90sec; | 1.Preheating:150~180 , Time:60~90sec. |
| 2 | 245±5 | | 5±0.5sec; | | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

1 0 q 1 Y T

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

9 E 4

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱